



IP INTERCOM SOLUTIONS





ABOUT DNAKE



17 YEARS
OF INTERCOM
EXPERIENCE



50,000 m²
TECHNOLOGY
PARK



180+ R&D
STAFF



90+
COUNTRIES
COVERED



**2-WIRE IP
INTERCOM**



**WIRELESS
DOORBELL**



**SMART
LIFE APP**



**LIFT
CONTROL**



**VIDEO
INTERCOM**




BROAD COMPATABILITY

Apartment Door:
280SD-C12





Control4 APP



Control4 Controller



Building Entrance:
S215

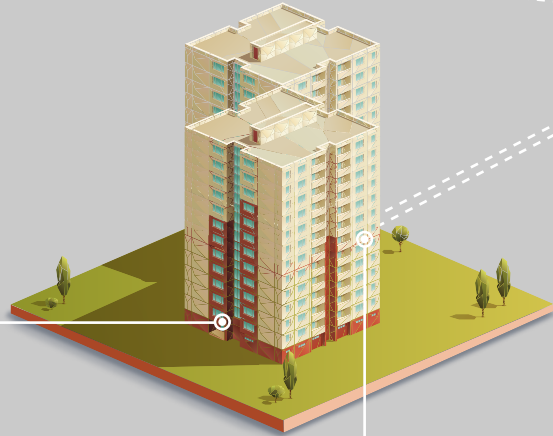

Yealink


GRANDSTREAM
CONNECTING THE WORLD

poly





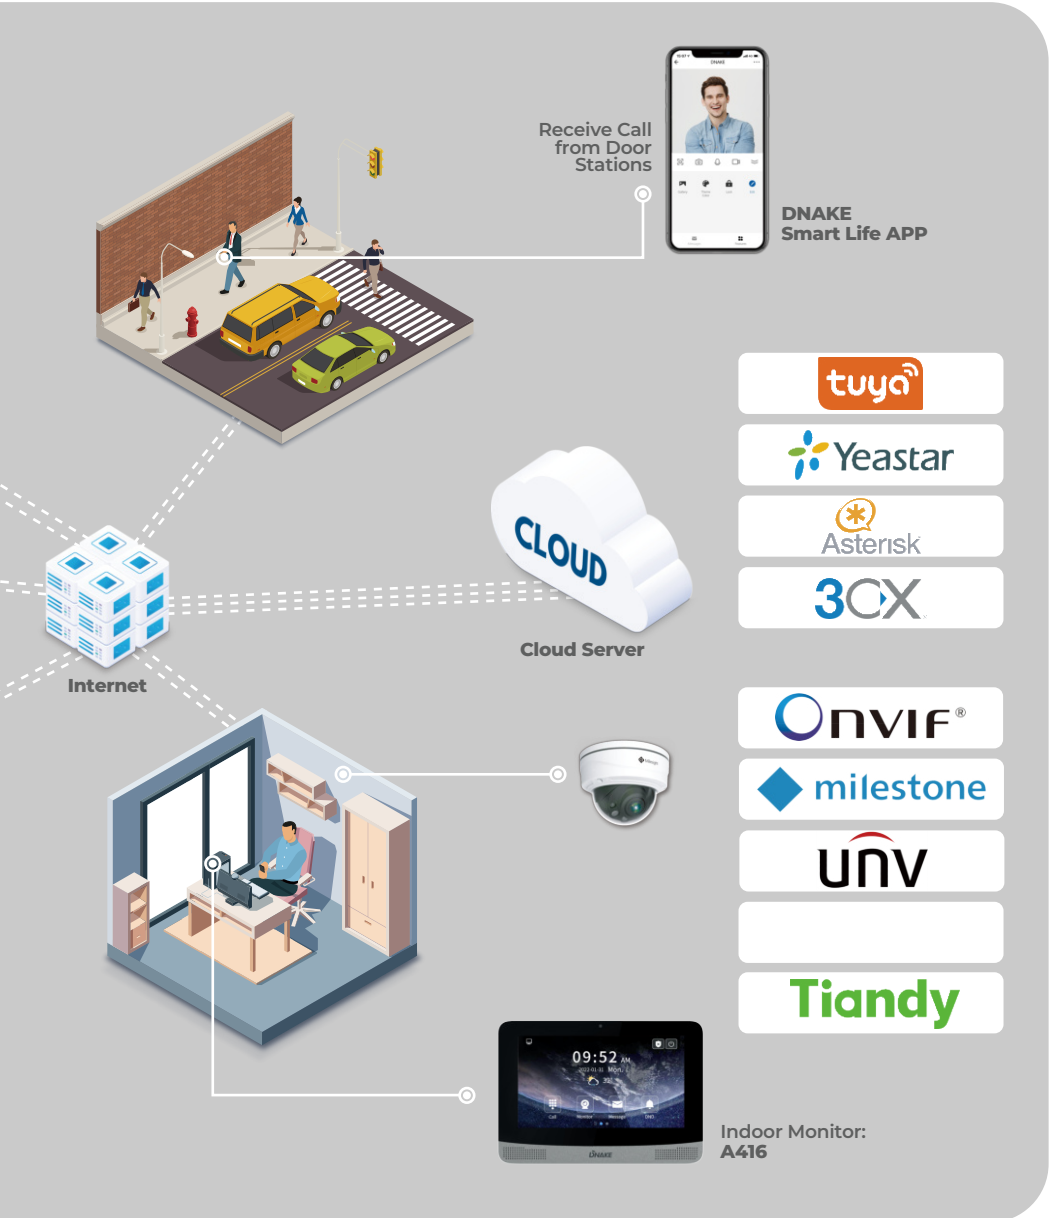


IP Phone











IP VIDEO INTERCOM

| Model | Y4 | B6 | S | | C12 | R2 |
|------------------|---|---|---|-------|---|--|
| Sub Model | 905D-Y4 Pro | 902D-B6 | S415 | S215 | 280SD-C12 | 280SD-R2 |
| Image |  |  |  | |  |  |
| Display | 7" | 10.1" | 4.3" | | × | × |
| Touch Screen | ○ | ○ | × | | × | × |
| Front Panel | Glass | Aluminum +Glass | Aluminum | | Aluminum | ABS |
| Operating System | Android | Android | Android | Linux | Linux | Linux |
| PoE | ○ | ○ | ○ | | ○ | ○ |
| SIP | ○ | ○ | ○ | | ○ | ○ |
| Camera | Dual cameras | ○ | ○ | | ○ | ○ |
| Wi-Fi | × | × | × | | × | × |
| PIN Card Entry | ○ | ○ | ○ | | ○ | ○ |
| Biometric Access | ○ | ○ | ○ | × | × | × |
| Wiegand | ○ | ○ | ○ | ○ | × | ○ |
| IP Rating | IP65 | IP65 | IP65 | | IP65 | IP65 |
| 3rd-party Apps | ○ | ○ | ○ | × | × | × |


○ YES ✕ NO ■ Red indicates highlight.

| R5 | S3 | A | E | E | A |
|--|---|---|---|---|--|
| 280SD-R5 | 904M-S3 | A416 | E416 | E216 | 902C-A |
|  |  |  |  |  |  |
| ✕ | 10.1" | 7" IPS | 7" TFT | 7" TFT | 10.1" |
| ✕ | ○ | ○ | ○ | ○ | ○ |
| ABS | Plastic | Plastic | Plastic | Plastic | Plastic |
| Linux | Android | Android 10 | Android 10 | Linux | Android |
| ✕ | ○ | ○ | ○ | ○ | ○ |
| ○ | ○ | ○ | ○ | ○ | ○ |
| ○ | Optional | Optional | ✕ | ✕ | ○ |
| ✕ | Optional | Optional | Optional | ✕ | ✕ |
| ○ | — | — | — | — | — |
| ✕ | — | — | — | — | — |
| ✕ | — | — | — | — | — |
| IP54 | Indoor | Indoor | Indoor | Indoor | Indoor |
| ✕ | ○ | ○ | ○ | ✕ | ○ |



IP VIDEO INTERCOM

DNAKE SIP-based Andorid/Linux video door phone solutions leverage cutting-edge technologies for building access and deliver higher security and convenience for modern residential buildings.

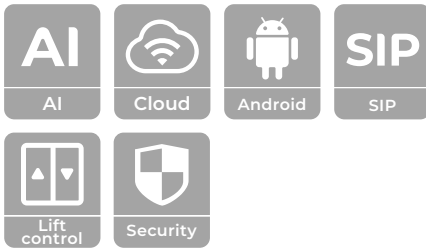



CALL LOGS

Any call log with date and time stamps can be viewed or deleted.



PREVIEW

See who's at the door before answering the call.



EASY SETUP

Scan QR code to bind the intercom device by using smart life APP in seconds.



VIDEO COMMUNICATION

Communication between the door station and mobile device is made simple.



PUSH NOTIFICATIONS

Get instant notifications of incoming calls even when the APP is offline.



REMOTE DOOR UNLOCKING

Get real-time notifications and unlock the door for the visitor anytime and anywhere.


DNAKE SMART LIFE APP





2-WIRE IP VIDEO INTERCOM


With the help of DNAKE IP 2-wire distributor, any analog intercom system can be upgraded to IP system with no cable replacement. Installation becomes fast, easy, and cost-effective.





WIRELESS DOORBELL

Your home entrance security matters. Choose any DNAKE Wireless Video Doorbell Kit, you'll never miss a visitor!

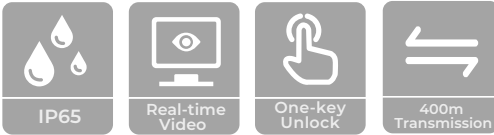



DNAKE S215

4.3" SIP Video DoorPhone

- 110° wide-angle with little distortion
- 3 relay outputs for door lock
- Induction loop for hearing impaired
- Braille dot for visually impaired
- 2MP HD camera with automatic lighting
- Door Entry: IC card (13.56MHz), ID card(125kHz), PIN code, NFC
- Aluminum panel
- Cold-resistant version (-40 °C to 55 °C) available
- Installation: Flush mounting & Surface mounting





DNAKE A416

7" Android 10 Indoor Monitor

- 7" IPS capacitive touch screen, 1024 x 600
- Improved performance (RAM:1G, ROM:8G)
- 802.11b/g/n Wi-Fi and 2MP camera optional
- 8-ch alarm input, 1 x RS485
- Surface or desktop mounting
- Easy home automation integration through 3rd-party apps






DNAKE 905D-Y4 Pro

7" Facial Recognition Android Doorphone

- 7" IPS capacitive touch screen
- Anti-spoofing algorithm against photos and videos
- Visible light face recognition
- Dual 2MP HD cameras with IR support
- Multiple access control methods: facial recognition, 13.56MHz access cards, password, NFC
- Up to 10000 faces, and 100000 cards can be added
- Quick to install and easy integration with IP telephone systems using SIP protocol support

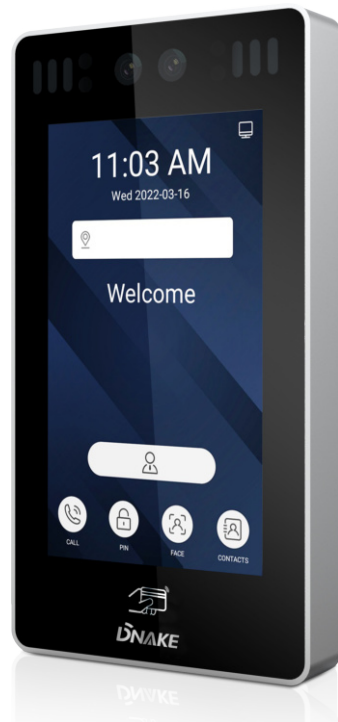



DNAKE E416

7" Android 10 Indoor Monitor

- 7" capacitive touch screen, 1024 x 600
- Improved performance (RAM:1G, ROM:8G)
- 802.11b/g/n Wi-Fi optional
- 8-ch alarm input, 1 x RS485
- Support surface & desktop mounting
- Easy home automation integration through 3rd-party apps



DNAKE E216

7" Linux-based Indoor Monitor

- 7" capacitive touch screen, 1024 x 600
- Video monitoring of DNAKE IP intercoms & IPC
- 8-ch alarm input, 1 x RS485
- Support surface & desktop mounting
- Quick installation and remote management via web interface






DNAKE S415

4.3" Facial Recognition Android Doorphone

- 120° wide-angle with little distortion
- 2MP HD camera with IR support
- Anti-spoofing algorithm against photos and videos
- Support multiple access control methods: facial recognition, NFC, 13.56MHz and 125kHz access cards
- Up to 10000 faces, and 100000 cards can be added
- Visible light face recognition
- Cold-resistant version (-40 °C to 55 °C) available
- Aluminum panel
- Quick to install and easy integration with IP telephone systems using SIP protocol support



COMING
SOON



DNAKE WIRELESS DOORBELL

- 400m transmission distance in open area
- Easy Wireless Installation(2.4GHz)

DK250 (DC200+DM50)



DC200

- IP65 Waterproof
- Tamper Alarm
- Working temperature: -10°C - +55°C
- One door camera support two indoor monitors
- Dual power options: Battery or DC 12V



DM50

- 7" TFT LCD, 800 x 480
- Real-time Monitoring
- One-key Unlock
- Photo Capture & Video Record (TF card, MAX:32G)
- Rechargeable Lithium Battery (2500mAh)
- Desktop / Wall Mounting



DNAKE WIRELESS DOORBELL

- 400m transmission distance in open area
- Easy Wireless Installation(2.4GHz)

DK230 (DC200+DM30)



DC200

- IP65 Waterproof
- Tamper Alarm
- Working temperature: -10°C - +55°C
- One door camera support two indoor monitors
- Dual power options: Battery or DC 12V



DM30

- 2.4" TFT LCD, 320 x 240
- Real-time Monitoring
- One-key Unlock
- Photo Capture
- Rechargeable Lithium Battery (1100mAh)
- Desktop mounting



Email:
sales01@dnake.com

Tel:
+86-592-5705812