


IP INTERCOM

4.3" SIP VIDEO DOOR PHONE

S215



As a 4.3" SIP video door phone, S215 is an extremely resistant IP intercom that can withstand the most demanding conditions. Allow easy integration with IP telephone systems using SIP technology and offer human-centric functionality, such as the built-in induction loop and keypad with braille dot. Take advantage of its superior features and achieve maximum site security.



FEATURES & BENEFITS

• SIP SUPPORT

SIP protocol support makes the intercom link with IP phones and PBX from other producers easily.

• ROBUST CASING

The door station is IP65 and IK 08 certified, which is designed to withstand rain, cold, heat, snow, dust, and cleaning agents and even the attacks by vandals.

• INTEGRATION INTO CCTV & VMS

By conformance with ONVIF Profile S, the video from door station can be monitored and recorded with third-party VMS/NVR systems, to greatly enhance the security level for all types of applications.

• HUMAN-CENTRIC DESIGN

Induction loop and numeric keypad with braille dot allow those who suffer from hearing or visual impairments to communicate more easily using an intercom system.


• WIDE-ANGLE HD CAMERA

With a 110-degree viewing angle, the 2MP camera provides wide and clear view and enables you to know every movement that happened at your door.

• MULTIPLE ACCESS

DNAKE S215 owns multiple ways of access authentication, mobile APP, PIN code, IC&ID card, or NFC, to provide reliable access control and satisfy different needs.

DIAGRAM

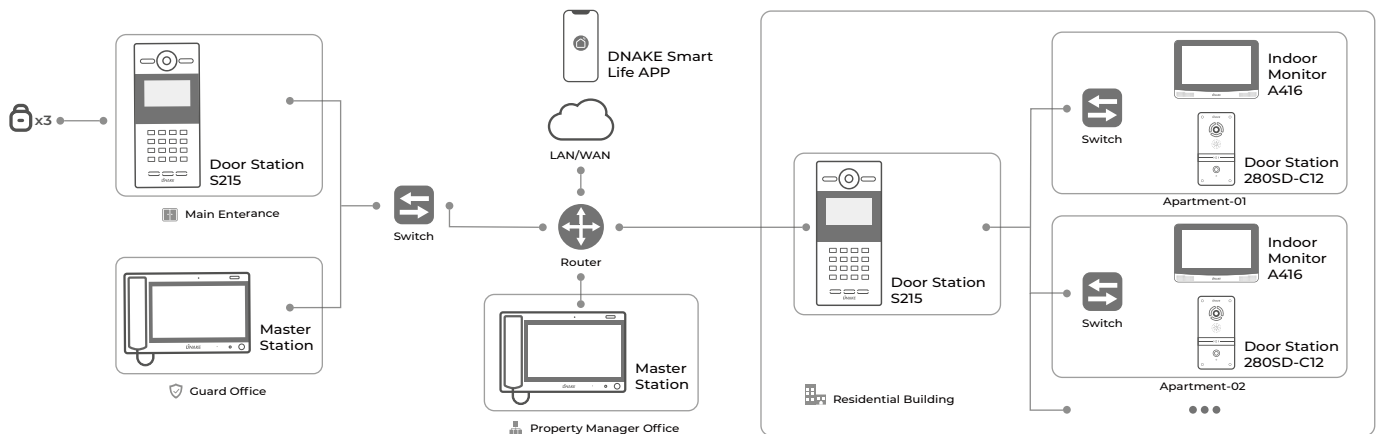

TECHNICAL PARAMETERS

Physical

System:	Linux
Front Panel:	Aluminum
Power Supply:	PoE (802.3af) or DC 12V/2A
Camera:	2MP, CMOS
Ethernet Ports:	1 x RJ45, 10 100 Mbps adaptive
Button:	Mechanical Button
Reset Button:	1
RS485 Port:	1
Relay Out:	3
Exit Button/Door Magnetic:	4
IP/IK Rating:	IP65/IK08
Installation:	Flush Mounting & Surface Mounting
Flush Mounting DIM:	295 x 133 x 63.5 mm
Surface Mounting DIM:	295 x 133 x 42.7 mm
Working Temperature:	-40 C to +55 C
Storage Temperature:	-40 C to +70 C
Working Humidity:	10% to 90% (non-condensing)

Display

Display:	4.3-inch TFF LCD
Resolution:	480 x 272

Audio

Codec:	G.711
Support:	Echo Cancellation
DTMF:	RFC2833
Microphone:	Built-in microphone
Speaker:	8Ω / 1W

Networking

Protocol:	Onvif, SIP, UDP, TCP, RTP, RTSP, NTP, DNS, HTTP, DHCP, IPV4, ARP, ICMP
-----------	--

Video

Codec:	H.264
Resolution:	1280 x 720
Viewing Angle:	110°(H)
Light Compensation:	LED white light