



# Squeeze to the next level H.265

Your OEM/ODM partner

4 Megapixel  
Weatherproof IR IP Cam

HLC-7BKQ



Hunt Electronic Co., LTD

# 4 Megapixel Weatherproof IR IP Cam


HLC-7BKQ



## ROI (Region of Interest)



OFF

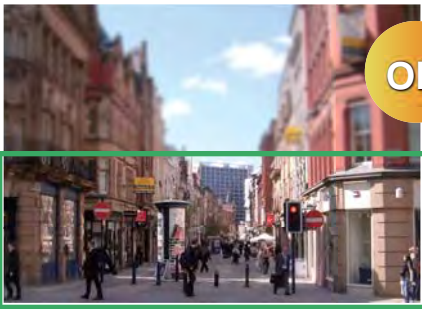

ON


Bitrate



ON

Bitrate  
fps

## Low Bandwidth

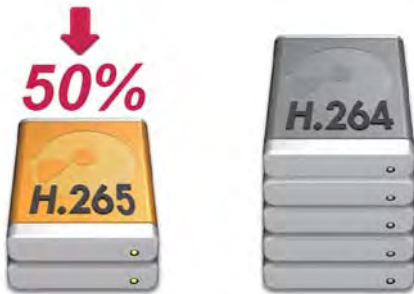


Save until 50% of HDD space

## 4 Megapixel Resolution (16:9)



Covering a broader view and impressively image details

## Wide Temperature Range

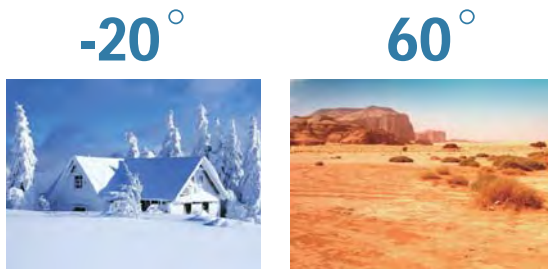

Working in the most extreme conditions

## Wide IR LED angle



Other cameras



Wider angle (HLC-7BKQ)



Hunt Electronic Co., LTD

www.hunt.com.tw



# 4 Megapixel Weatherproof IR IP Cam

HLC-7BKQ



## Main Features:

- ◆ 4 Megapixel IR Bullet Real Time IP Camera
- ◆ H.265/ H.264/ M-JPEG Compression
- ◆ Bandwidth Savings up to 50%
- ◆ ROI Function

## Specification

<b>Image Sensor</b>	1 / 3" Megapixel CMOS Sensor			
<b>Lens</b>	2.8 - 12mm @ F1.4			
<b>Sensitivity</b>	Color : 0.08 Lux (AGC ON) B / W : 0.03 Lux (AGC ON)			
<b>View Angle</b>	34.47° ~ 92.42° (H), 19.42° ~ 48.24° (V)			
<b>IR Distance</b>	28 Units 5φ + 2 Units High Power, 30 Meters			
<b>Video Compression</b>	H.265 / H.264 / M-JPEG			
<b>Max. Resolution</b>	2592x1520			
<b>Resolution</b>	2592x1520@25fps	1920x1080@30fps	1280x720@30fps	640x360@30fps
<b>Audio Compression</b>	G.711 (64K) / G.726 (32K,24K)			
<b>Audio</b>	Input : 3.5mm phone jack Output : 3.5mm phone jack Support 2-way			
<b>I/O</b>	DI x 1 / DO x 1			
<b>Security</b>	Password protection, IP address filtering, HTTPS encrypted data transmission, 802.1X port-based authentication for network protection			
<b>Network Protocol</b>	IPv6, IPv4, HTTP, HTTPS, SNMP, QoS/DSCP, Access list, IEEE 802.1X, RTSP, TCP/IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, UPnP, 3GPP, SAMBA, Bonjour			
<b>Power Consumption</b>	DC 12V : 6W (IR ON) 3.12W (IR OFF) PoE : 7.68W (IR ON) 3.84W (IR OFF)			
<b>Others</b>	ROI, Motion Detection, Privacy Mask, Support Micro SD Card(Optional), Wireless (Optional), BNC, Tampering Detection, 3-Axis Cable Management, IP66, BNC, P2P (Optional)			
<b>Dimensions</b>	Ø77.4 x H125.5 (mm)			

◆ SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE



Hunt Electronic Co., LTD

www.hunt.com.tw

