



FS 168B ANTI-ROBBING SECURITY SMOG JET MACHINE

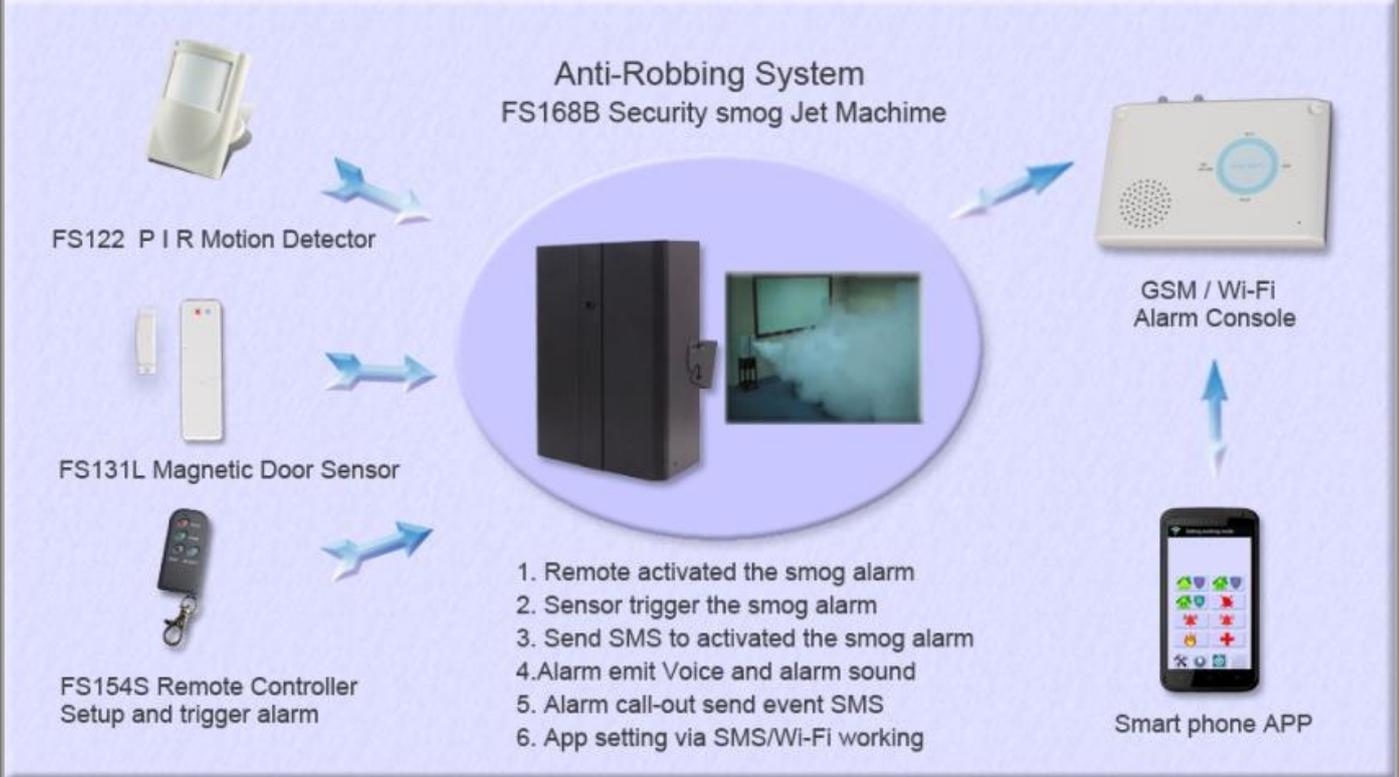

Emergency case: Anti Robberies on Bank, jewel stores, pawn shops, atms convenient stories.

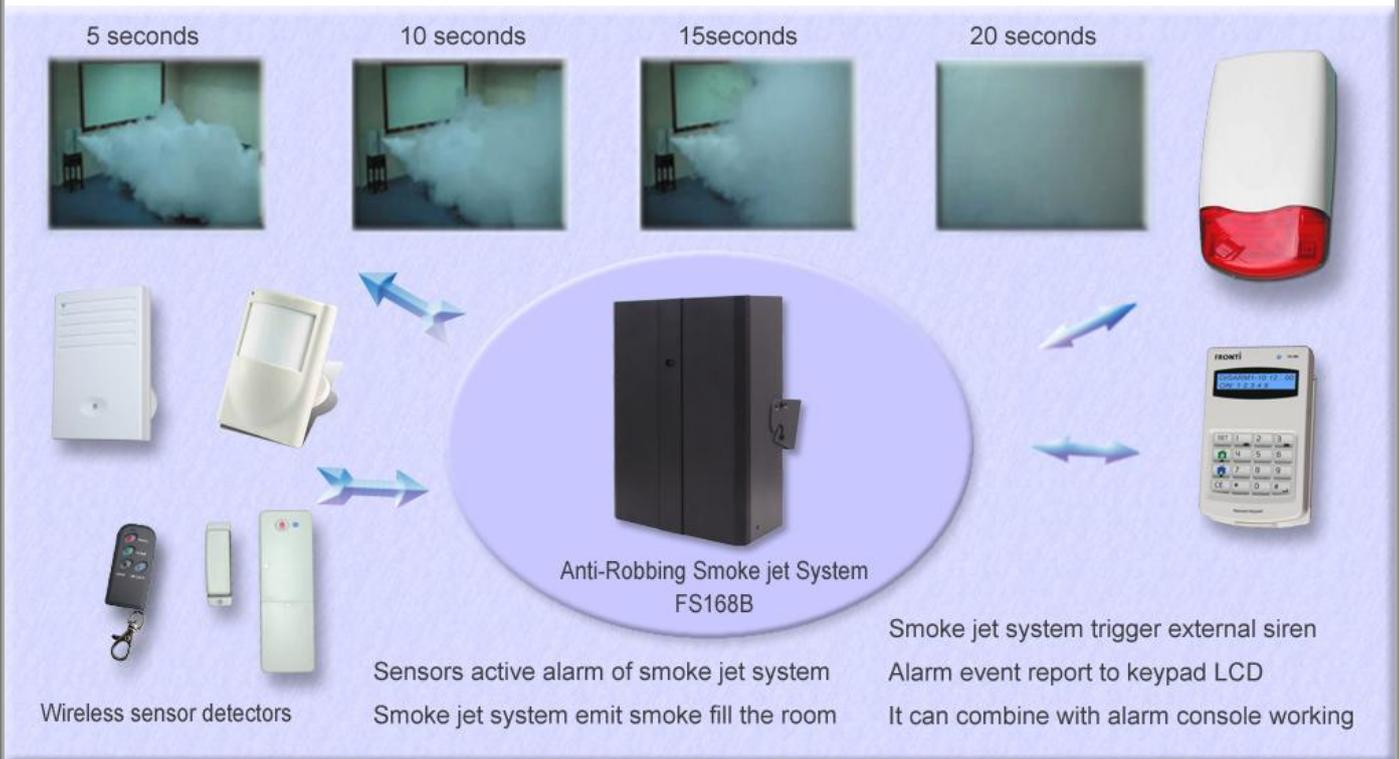

● **Markets & Applications:**

FRONTI offers a unique solution to this robbery problem. The system can be remote trigger, or when sensors detect an intruder, both it will be triggered alarm and then within very short time to fill smog in the room, the shop or warehouse with thick non-transparent smog. This smog prevents burglars from entering the room for at least.

In these thirty minutes, burglars cannot see in the room. The spread smog has light mint smell which is colorless and leaves no trace.

It ejects smog to pervade the whole area in few seconds to scare away the burglars.

The smog is plant vapor causing no harm to human body.

SMOG system is always installed in the room which contains the most valuable objects, thus limit the burglary damage to stricken minimum.

The smog creates low visibility in large area and stay effect for 30 minutes. It provides the best “ First aid” to the User’s life and property before police or security member arrive.

Emergency case: Robberies. (Bank, jewel stores, pawn shops, convenient stores, ATMs)

● **Features:**

1. Remote operate working mode: away armed/disarmed and 24-hour trigger alarm.
2. Can combine with Fronti wireless sensors total 20pcs, and also with wireless external siren.
3. Remote trigger alarm or sensors trigger to activate the jet smog.
4. It can combine with GSM auto dialer to voice play dialer and send SMS to report alarm event.
5. It can call-in send SMS command to activate the jet smog.
6. When the alarm is triggered, it will emit warning voice sound and the alarm sounds.
7. It also can combine with GSM/Wi-Fi console that can be wireless sensor/user remote/APP control working.
8. Build-in wire NC/NO alarm input port to connect wire emergency switch or sensors detector to trigger alarm.
9. Build-in wire NC alarm output port to connect alarm console or GSM auto dialer to report alarm event.
10. When the AC power lost, user can select standard 500-1000W UPS system for back-up power,.
11. If the alarm is triggered, the smog will quickly expand and permeate the whole area within 30seconds.
12. Duration of smog effectiveness: 30 minutes, Visibility: Approximately. 20cm
13. The smog is made from non-harmful vegetable formula.(food additive)
14. Controllable duration of smog. (from 30 or 180 seconds)
15. Three-color LED smog generator will display situation when triggered.
16. Smog generator will emit warning buzzer to show system fault condition.

SPECIFICATION

Power Source	AC100-120V or 220-240V
Heater warmed up power consuming	1000W (Max)
Heater first warm-up timing	10minutes
Average power consuming	60W
Working frequency	433.92MHz or 869.25MHz
Broadcast range	150M in a free space
Smoke Output	10,000 cubic feet/ per minute
Fluid Bag Capacity	500 c.c. (0.5 Liter)
Fluid Consumption Rate	18 minutes / per liter
Dimension	43.5L x 29.7W x 13.6H cm
Weight	Net 14.5kg Gross 16.5kg

PACKAGES

FS168B Anti Robbing Security smog jet machine
 FS168 Liquid water (500cc)
 FS154S Remote Controller 4 buttons