



## EMC TEST REPORT

**REPORT NO.:** EMC0705004

**MODEL NO.:** ATM-40S, ATM-40D

**RECEIVED:** April 28,2007

**TESTED:** April 28,2007 to May 09, 2007

**APPLICANT:** Sunlit Technology (HK) Co., Limited.

**ADDRESS:** Unit 1001, Fourseas Building, 208-212 Nathan Rd, KL, HK

**ISSUED BY:** SHENZHEN SETEK TECHNOLOGY CO., LTD.

**LAB LOCATION:** 2/F,A3 Bldg, East Industry Zone, Overseas  
Chinese Town, Shenzhen, China

This test report consists of 40 pages in total, it may be duplicated completely for legal use with the approval of the applicant, It should not be reproduced except in full, without the written approval of our laboratory, The test results in the report only apply to the tested sample.

**SHENZHEN SETEK TECHNOLOGY CO., LTD.**

Our website: [www.setek.com.cn](http://www.setek.com.cn)      E-mail:Service@setek.com.cn  
TEL:86-755-26966362      FAX: 86-755-26966270

Prepared for : Sunlit Technology (HK) Co., Limited.  
 Address : Unit 1001, Fourseas Building, 208-212 Nathan Rd, KL, HK  
 Product : PIR Motion Detector  
 Model No. : ATM-40S, ATM-40D  
 Trademark : SUNLIT TECH  
 Test Standard : EN61000-6-3:2001+A11:2004  
                   EN61000-3-2: 2006,  
                   EN61000-3-3:1995+A1:2001+A2:2005  
                   EN61000-6-1:2001  
                   (EN61000-4-2: 1995+A1:1998+A2:2001, EN61000-4-3: 2006, EN61000-4-4:  
                   2004, EN61000-4-5: 2001, EN61000-4-6: 2001, EN61000-4-8: 2001,  
                   EN61000-4-11: 2001)  
 Prepared by : SHENZHEN SETEK TECHNOLOGY CO., LTD.  
 Address : 2/F,A3 Bldg,East Industry Zone,Overseas Chinese Town,  
                   Shenzhen,China  
 Tel: (86-755) 26966362 Fax:(86-755) 26966270  
 Prepared by : James Wu  
                   \_\_\_\_\_  
                   (Engineer)  
 Reviewer by : Boghe Wu  
                   \_\_\_\_\_  
                   (Project Engineer)  
 Approved by : Phoenix Zhang  
                   \_\_\_\_\_  
 Report Number : EMC0705004  
 Date of Test : April 28,2007 to May 09,2007  
 Date of Report : May 09, 2007



The device described above is tested by SHENZHEN SETEK TECHNOLOGY CO., LTD. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. This report applies to above tested sample only and shall not be reproduced in part without written approval of SHENZHEN SETEK TECHNOLOGY CO., LTD.

## TABLE OF CONTENT

Description	Page
<b>Test Report Description</b>	
<b>1. GENERAL INFORMATION .....</b>	<b>5</b>
1.1. Description of Device (EUT).....	5
1.2. Test Standards.....	6
1.3. Measurement Uncertainty.....	6
<b>2. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>7</b>
2.1. For Power Line Conducted Emission .....	7
2.2. For Radiated Emission Measurement .....	7
2.3. For Harmonic Current / Flicker Measurement.....	7
2.4. For Electrostatic Discharge Immunity Test.....	7
2.5. For RF Strength Susceptibility Test .....	8
2.6. For Electrical Fast Transient/Burst Immunity Test.....	8
2.7. For Surge Immunity Test.....	8
2.8. For Injected Current Susceptibility Test.....	8
2.9. For Magnetic Field Immunity Test.....	8
2.10. For Voltage Dips and Interruptions Test.....	9
<b>3. POWER LINE CONDUCTED EMISSION MEASUREMENT .....</b>	<b>10</b>
3.1. Block Diagram of Test Setup .....	10
3.2. Measuring Standard .....	10
3.3. EUT Configuration on Measurement.....	10
3.4. Operating Condition of EUT .....	11
3.5. Test Procedure .....	11
3.6 Measuring Results .....	11
<b>4. RADIATED EMISSION MEASUREMENT.....</b>	<b>12</b>
4.1. Block Diagram of Test .....	12
4.2. Measuring Standard .....	12
4.3. Radiated Emission Limits .....	13
4.4. EUT Configuration on Test.....	13
4.5. Operating Condition of EUT .....	13
4.6. Test Procedure .....	13
4.7. Measuring Results .....	13
<b>5. HARMONIC CURRENT EMISSION MEASUREMENT.....</b>	<b>16</b>
5.1 Block Diagram of Test Setup .....	16
5.2 Measuring Standard.....	16
5.3 Operation Condition of EUT .....	16
5.4 Measuring Results .....	16
<b>6.VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT .....</b>	<b>17</b>
6.1 Block Diagram of Test Setup .....	17
6.2 Measuring Standard .....	17
6.3 Operation Condition of EUT .....	17
6.4 Measuring Results .....	17
<b>7. ELECTROSTATIC DISCHARGE IMMUNITY TEST .....</b>	<b>18</b>
7.1 Block Diagram of Test Setup .....	18
7.2 Test Standard .....	18
7.3 Severity Levels and Performance Criterion .....	18
7.4 EUT Configuration.....	19
7.5 Operating Condition of EUT .....	19
7.6 Test Procedure .....	19

7.7 Test Results .....	19
<b>8. RF FIELD STRENGTH SUSCEPTIBILITY TEST .....</b>	<b>21</b>
8.1 Block Diagram of Test .....	21
8.2 Test Standard .....	21
8.3 Severity Levels and Performance Criterion .....	22
8.4 EUT Configuration on Test .....	22
8.5 Operating Condition of EUT .....	22
8.6 Test Procedure .....	22
8.7 Test Results .....	22
<b>9. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST .....</b>	<b>24</b>
9.1 Block Diagram of Test Setup .....	24
9.2 Test Standard .....	24
9.3 Severity Levels and Performance Criterion .....	24
9.4 EUT Configuration .....	25
9.5 Operating Condition of EUT .....	25
9.6 Test Procedure .....	25
9.7 Test Result .....	25
<b>10. SURGE IMMUNITY TEST.....</b>	<b>26</b>
10.1 Block Diagram of Test Setup .....	26
10.2 Test Standard .....	26
10.3 Severity Levels and Performance Criterion .....	26
10.4 EUT Configuration .....	27
10.5 Operating Condition of EUT .....	27
10.6 Test Procedure .....	27
10.7 Test Result .....	27
<b>11. INJECTED CURRENTS SUSCEPTIBILITY TEST .....</b>	<b>28</b>
11.1 Block Diagram of Test Setup .....	28
11.2 Test Standard .....	28
11.3 Severity Levels and Performance Criterion .....	28
11.4 EUT Configuration .....	29
11.5       Operating Condition of EUT .....	29
11.6 Test Procedure .....	29
<b>12. MAGNETIC FIELD SUSCEPTIBILITY TEST .....</b>	<b>30</b>
12.1 Block Diagram of Test .....	30
12.2 Test Standard .....	30
12.3 Severity Levels and Performance Criterion .....	31
12.4 EUT Configuration on Test .....	31
12.5 Test Procedure .....	31
12.6Test Results .....	31
<b>13. VOLTAGE DIPS AND INTERRUPTIONS TEST .....</b>	<b>33</b>
13.1 Block Diagram of Test Setup .....	33
13.2 Test Standard .....	33
13.3 Severity Levels and Performance Criterion .....	34
13.4 EUT Configuration .....	34
13.5 Operating Condition of EUT .....	34
13.6 Test Procedure .....	34
13.7 Test Result .....	34
<b>14. PHOTOGRAPH .....</b>	<b>35</b>
14.1 Photo of Radiation Emission Measurement .....	35
14.2Photo of Electrostatic Discharge Measurement.....	35
14.3Photo of RF FIELD STRENGTH SUSCEPTIBILITY Measurement .....	36

## APPENDIX I (Photos of EUT) (3 Pages)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT : PIR Motion Detector

Model Number : ATM-40S, ATM-40D  
(Note: The samples are the same, just appearance and model names are different for the marketing requirement. We prepare ATM-40D for EMC test.)

Power Supply : DC9V-16V

Applicant : Sunlit Technology (HK) Co., Limited.

Address : Unit 1001, Fourseas Building, 208-212 Nathan Rd, KL, HK

Manufacturer : Sunlit Technology Co., Limited.

Address : 26F, No. 3 Bld, Modern Mansion Chuangye Rd, Nanshan, Shenzhen

Received : May 09, 2007

Date of Test : April 28, 2007 to May 09, 2007

## 1.2. Test Standards

Test Standards	
EN61000-6-3:2001 +A11:2004	Electromagnetic compatibility (EMC) -- Part 6-3: Generic standards - Emission standard for residential, commercial and light-industrial environments Amendment A11:2004 to EN61000-6-3:2001
EN61000-6-1:2001	Electromagnetic compatibility (EMC) -- Part 6-1: Generic standards - Immunity for residential, commercial and light-industrial environments
EN61000-3-2:2006	Electromagnetic compatibility(EMC)-Part 3-2:Limits-Limits for harmonic current emissions(equipment input current 16A per phase)
EN61000-3-3:1995 +A1:2001 +A2:2005	Electromagnetic compatibility(EMC)-Part 3-3:Limits-Limitation of voltage changes,Voltage fluctuations and fliker in public low-voltage supply systems. For equipment with Rated current 16A per phase and not subject to conditional connection Amendment A1:2001 to EN61000-3-3:1995 Amendment A2:2005 to EN61000-3-3:1995

## 1.3. Measurement Uncertainty

Radiation Uncertainty : Ur = ± 3.84dB

Conduction Uncertainty : Uc = ± 2.72dB

## 2. MEASURING DEVICE AND TEST EQUIPMENT

### 2.1. For Power Line Conducted Emission

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCS30	828985/018	May 29, 2006	1 Year
2.	L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	May 29, 2006	1 Year
3.	50ΩCoaxial Switch	Anritsu	MP59B	M20531	N/A	N/A
4.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	May 29, 2006	1 Year
5.	Voltage Probe	Rohde & Schwarz	TK9416	N/A	May 29, 2006	1 Year

### 2.2. For Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analyzer	ANRITSU	MS2661C	6200140915	May 29, 2006	1 Year
2.	Test Receiver	Rohde & Schwarz	ESCS30	828985/018	May 29, 2006	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	142	May 29, 2006	1 Year
4.	50 Coaxial Switch	Anritsu Corp	MP59B	6100237248	May 29, 2006	1 Year
5.	EMI Power Line Filter	DUOJI EME	FNF 201 B16	N/A	May 29, 2006	1 Year
6.	EMI Power Line Filter	JIANLI	DL-40C	N/A	May 29, 2006	1 Year
7.	Cable	Schwarzbeck	AK9513	ACRX1	May 29, 2006	1 Year
8.	Cable	Rosenberger	N/A	FP2RX2	May 29, 2006	1 Year
9.	Cable	Schwarzbeck	AK9513	CRPX1	May 29, 2006	1 Year
10.	Cable	Schwarzbeck	AK9513	CRRX2	May 29, 2006	1 Year
11.	Signal Generator	HP	8648A	3625U00573	May 29, 2006	1 Year

### 2.3. For Harmonic Current / Flicker Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Power Frequency Test System	HAEFELY	PHF555	080419-03	May 29, 2006	1 Year
2.	PC	N/A	P2L97	N/A	May 29, 2006	N/A

### 2.4. For Electrostatic Discharge Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Tester	HAEFELY	PESD1600	H708159	May 29, 2006	1 Year

## 2.5. For RF Strength Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Signal Generator	HP	8648A	3625U00573	May 29, 2006	1 Year
2.	Amplifier	AR	500A100	17034	NCR	NCR
3.	Amplifier	AR	100W/1000M1	17028	NCR	NCR
4.	Isotropic Field Monitor	AR	FM2000	16829	NCR	NCR
5.	Isotropic Field Probe	AR	FP2000	16755	May 29, 2006	1 Year
6.	Biconic Antenna	EMCO	3108	9507-2534	NCR	NCR
7.	Log-periodic Antenna	AR	AT1080	16812	NCR	NCR
8.	PC	N/A	486DX2	N/A	N/A	N/A

## 2.6. For Electrical Fast Transient /Burst Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Burst Tester	HAEFELY	PEFT4010	080981-16	May 29, 2006	1 Year
2.	Coupling Clamp	HAEFELY	IP-4A	147147	May 29, 2006	1 Year

## 2.7. For Surge Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Surge Tester	HAEFELY	PSURGE4.1	080107-04	May 29, 2006	1 Year

## 2.8. For Injected Current Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Simulator	EMTEST	CWS500C	0900-12	May 29, 2006	1 Year
2.	CDN	EMTEST	CDN-M2	5100100100	May 29, 2006	1 Year
3.	CDN	EMTEST	CDN-M3	0900-11	May 29, 2006	1 Year
4.	Injection Clamp	EMTEST	F-2031-23 MM	368	May 29, 2006	1 Year
5.	Attenuator	EMTEST	ATT6	0010222A	May 29, 2006	1 Year

## 2.9. For Magnetic Field Immunity Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Magnetic Field Tester	HAEFELY	MAG100	250040.1	May 29, 2006	1 Year

## 2.10. For Voltage Dips and Interruptions Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Dips Tester	HAEFELY	Pline1610	083732-12	May 29, 2006	1 Year

### 3. POWER LINE CONDUCTED EMISSION MEASUREMENT

#### 3.1. Block Diagram of Test Setup

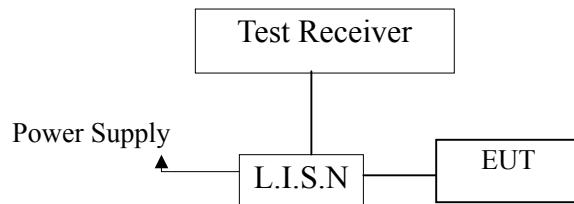

(EUT: PIR Motion Detector)

#### 3.2. Measuring Standard

EN61000-6-3:2001+A11:2004

Power Line Conducted Emission Limits (Class B)

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.  
 NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

#### 3.3. EUT Configuration on Measurement

The following equipments are installed on Conducted Emission Measurement to meet EN61000-6-3:2001+A11:2004 requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

EUT	:	PIR Motion Detector
Model Number	:	ATM-40D
Serial Number	:	N/A
Manufacturer	:	Sunlit Technology (HK) Co., Limited.

### 3.4.Operating Condition of EUT

- 3.4.1.Setup the EUT as shown on Section 3.1.
- 3.4.2.Turn on the power of all equipments.
- 3.4.3.Let the EUT work in measuring mode (Normal) and measure it.

### 3.5.Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the EN 55022 regulations during conducted emission measurement.

The bandwidth of the field strength meter (R&S Test Receiver ESCS30) is set at 9KHz in 150KHz~30MHz and 200Hz in 9KHz~150KHz.

The frequency range from 150kHz to 30MHz is investigated

### 3.6 Measuring Results


**N/A**

N/A—Not apply.

## 4. RADIATED EMISSION MEASUREMENT


### 4.1. Block Diagram of Test

#### 4.1.1. Block diagram of connection between the EUT and simulators



(EUT: PIR Motion Detector)

#### 4.1.2. Block diagram of test setup (In chamber)

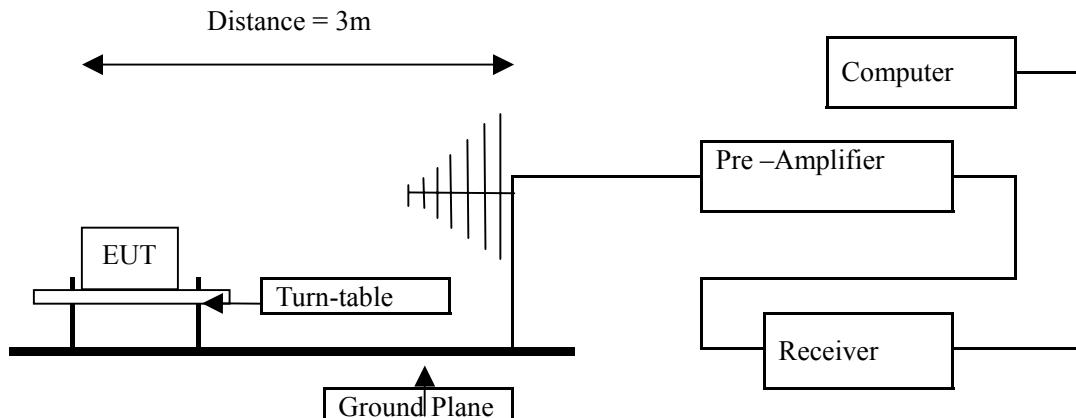

(EUT: PIR Motion Detector)

### 4.2. Measuring Standard

EN61000-6-3:2001+A11:2004

### 4.3.Radiated Emission Limits

All emanations from a class B device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMIT (dB $\mu$ V/m)
30 ~ 230	10	30
230 ~ 1000	10	37

- Note: (1) The smaller limit shall apply at the combination point between two frequency bands.  
(2) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the EUT.

### 4.4.EUT Configuration on Test

The EN61000-6-3:2001+A11:2004 regulations test method must be used to find the maximum emission during radiated emission measurement.

### 4.5.Operating Condition of EUT

4.5.1.Turn on the power.

4.5.2.After that, let the EUT work in test mode (Normal) and measure it.

### 4.6.Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Bilog antenna (calibrated by Dipole Antenna) is used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the Receiver (ESCS30) is set at 120kHz.


The frequency range from 30MHz to 1000MHz is investigated.

### 4.7.Measuring Results


**PASS.**

Please reference to the following pages

EUT: PIR Motion Detector (ATM-40D)  
Manufacturer: Sunlit  
Operating Condition: Normal  
Test Site: 3m Chamber  
Operator: OU  
Test Specification: H

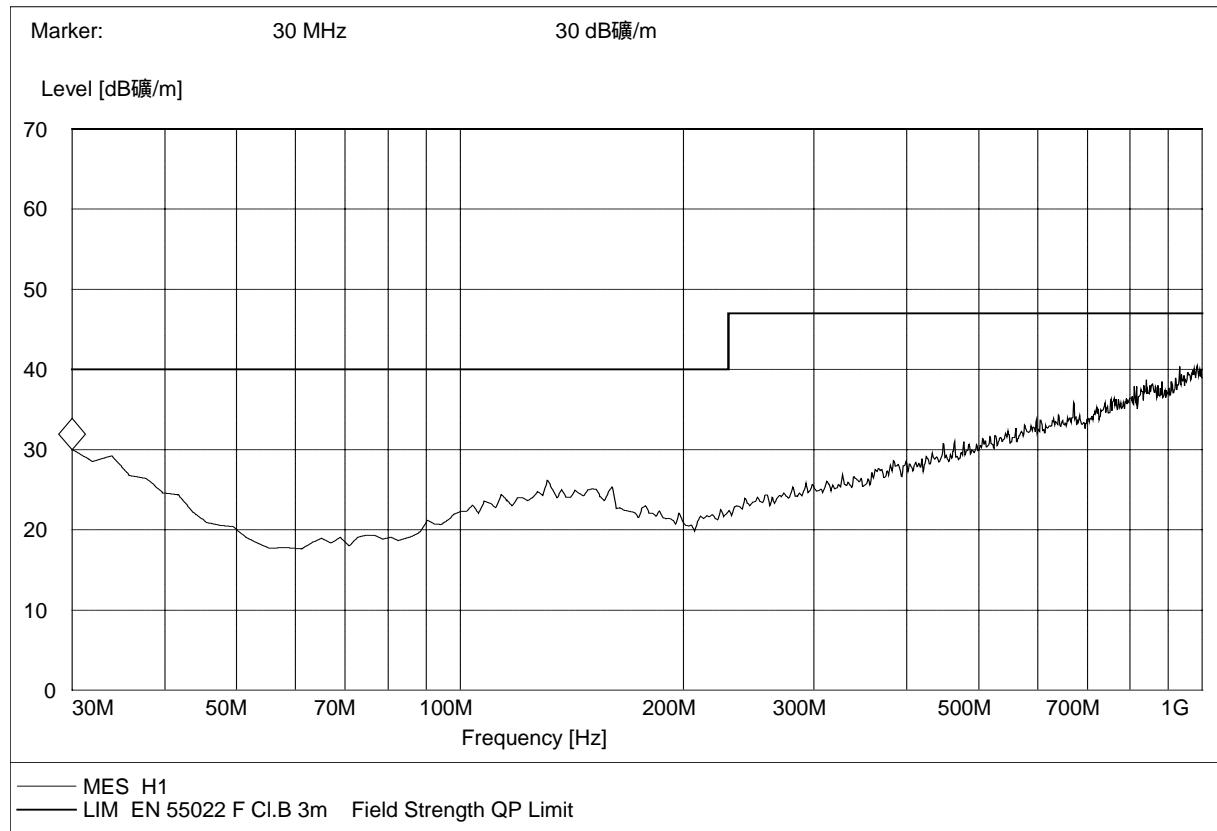


EUT: PIR Motion Detector (ATM-40D)  
Manufacturer: Sunlit  
Operating Condition: Normal  
Test Site: 3m Chamber  
Operator: OU  
Test Specification: V

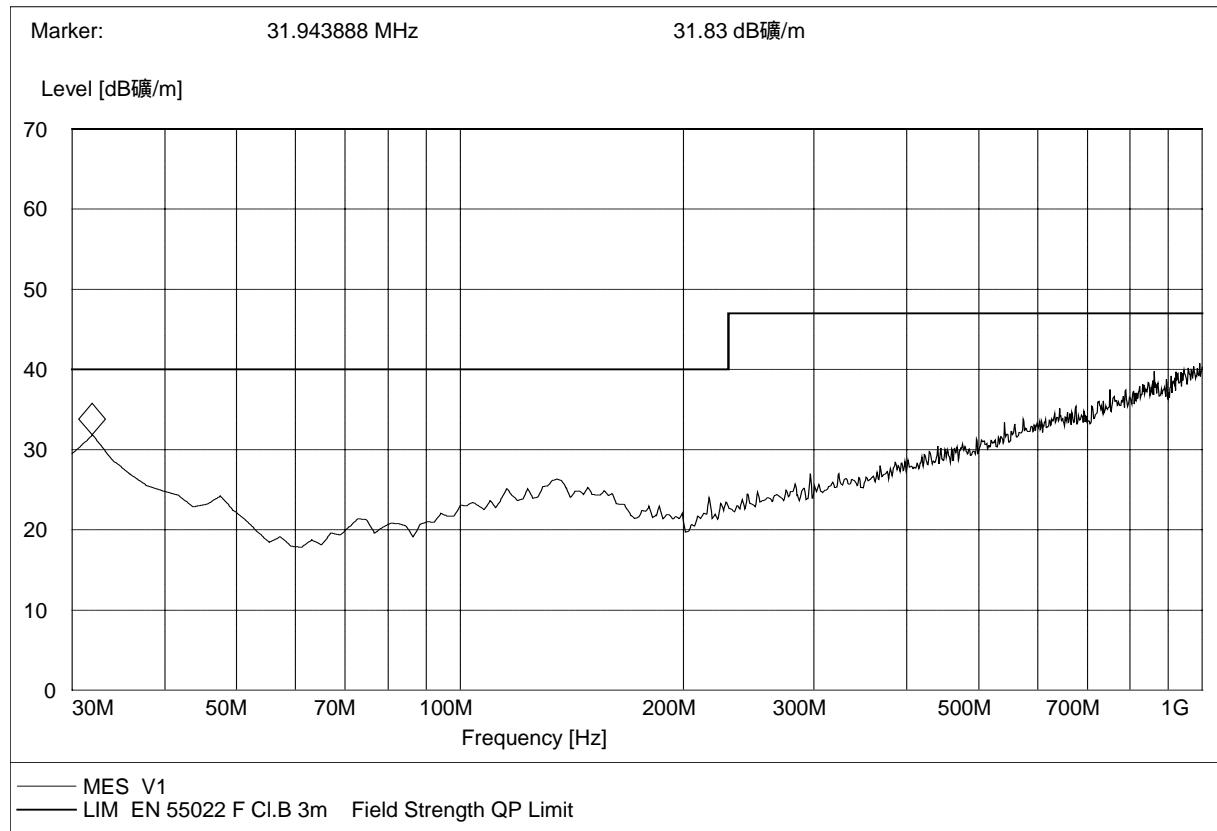

## 5. HARMONIC CURRENT EMISSION MEASUREMENT

### 5.1 Block Diagram of Test Setup

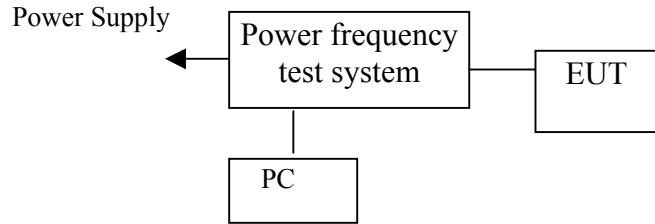

(EUT: PIR Motion Detector)

### 5.2 Measuring Standard

EN 61000-3-2: 2006 CLASS A

### 5.3 Operation Condition of EUT

Same as Section 3.4, except the test setup replaced as Section 5.1.


### 5.4 Measuring Results

**N/A**

\* N/A ---Not apply.

## 6.VOLTAGE FLUCTUATION AND FLICKER MEASUREMENT

### 6.1 Block Diagram of Test Setup

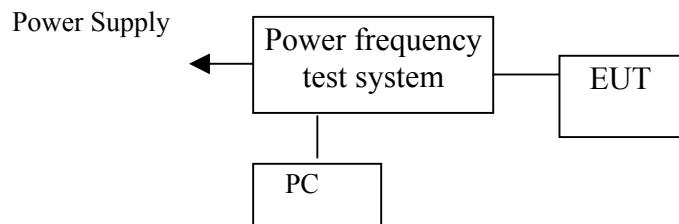

(EUT: PIR Motion Detector)

### 6.2 Measuring Standard

EN 61000-3-3:1995+A1: 2001+A2: 2005

### 6.3 Operation Condition of EUT

Same as Section 3.4, except the test setup replaced as Section 6.1.

### 6.4 Measuring Results


N/A

N/A---Not apply.

## 7. ELECTROSTATIC DISCHARGE IMMUNITY TEST


### 7.1 Block Diagram of Test Setup

#### 7.1.1 Block diagram of connection between the EUT and simulators

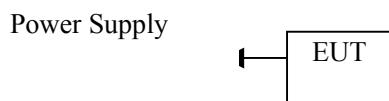

(EUT: PIR Motion Detector)

#### 7.1.2 Block diagram of ESD test setup

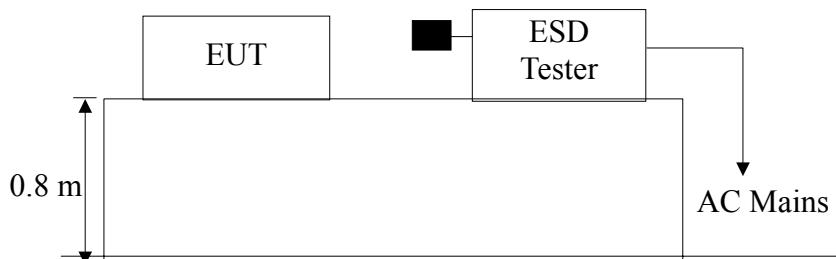

(EUT: PIR Motion Detector)

### 7.2 Test Standard

EN61000-4-2: 1995+A1:1998+A2:2001

Severity Level: 3 / Air Discharge:  $\pm 8\text{KV}$  Level: 2 / Contact Discharge:  $\pm 4\text{KV}$

### 7.3 Severity Levels and Performance Criterion

#### 7.3.1 Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	$\pm 2$	$\pm 2$
2.	$\pm 4$	$\pm 4$
3.	$\pm 6$	$\pm 8$
4.	$\pm 8$	$\pm 15$
X	Special	Special

#### 7.3.2 Performance criterion: B

## 7.4 EUT Configuration

The configuration of EUT is listed in Section 3.3.

## 7.5 Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 3.4. Except the test set up replaced by Section 7.1.

## 7.6 Test Procedure

### 7.6.1 Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

### 7.6.2 Contact Discharge:

All the procedure shall be same as Section 7.6.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

### 7.6.3 Indirect discharge for horizontal coupling plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

### 7.6.4 Indirect discharge for vertical coupling plane

At least 10 single discharge (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

## 7.7 Test Results

PASS

Please refer to the following page


# Electrostatic Discharge Test Result

SHENZHEN SETEK TECHNOLOGY CO.,LTD

## 8. RF FIELD STRENGTH SUSCEPTIBILITY TEST


### 8.1 Block Diagram of Test

#### 8.1.1 Block diagram of connection between the EUT and Load



(EUT: PIR Motion Detector)

#### 8.1.2 Block diagram of RS test setup

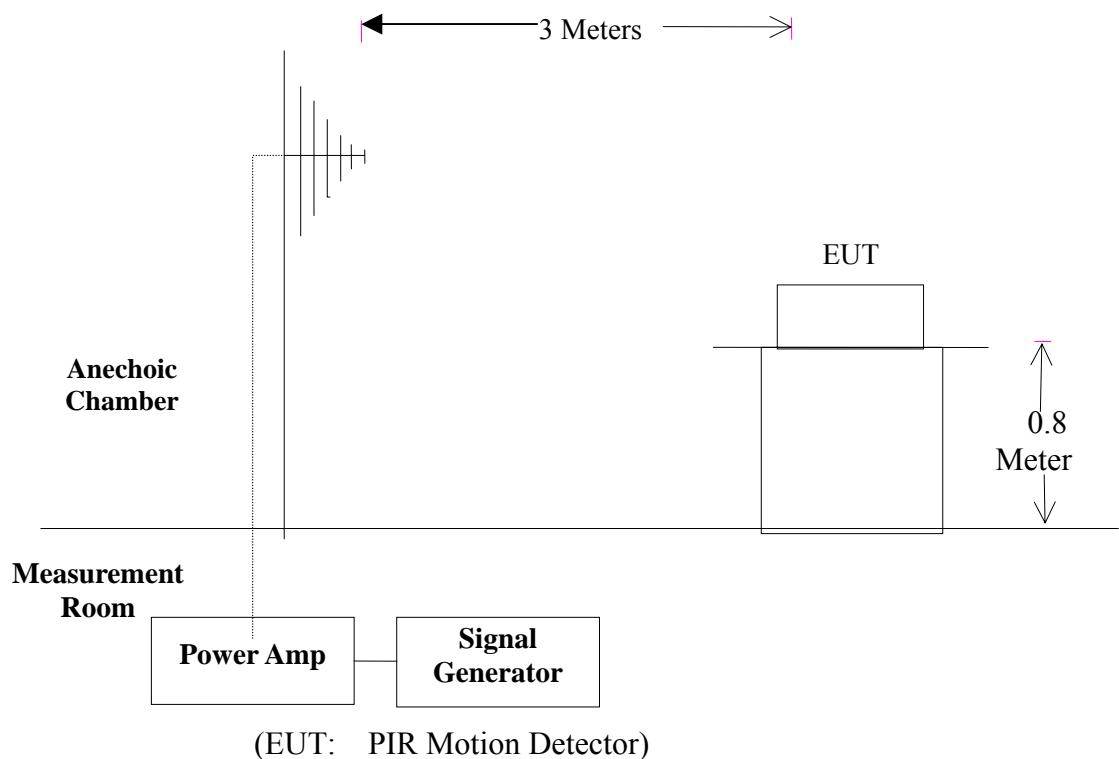

### 8.2 Test Standard

EN61000-4-3: 2006 (Severity Level: 2, 3V / m)

### 8.3 Severity Levels and Performance Criterion

#### 8.3.1 Severity Levels

Level	Field Strength V/m
1.	1
2.	3
3.	10
X	Special

#### 8.3.2 Performance Criterion : A

### 8.4 EUT Configuration on Test

The configuration of the EUT is same as Section 3.3.

### 8.5 Operating Condition of EUT

Same as radiated emission measurement which is listed in Section 3.4, except the test setup replaced as Section 8.1.

### 8.6 Test Procedure

The EUT are placed on a table which is 0.8 meter high above the ground. The EUT is set 3 meters away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of the EUT must be faced this transmitting antenna and measured individually. In order to judge the EUT performance, a CCD camera is used to monitor its screen. All the scanning conditions are as following:

Condition of Test	Remark
1. Fielded Strength	3V/m (Severity Level 2)
2. Radiated Signal	Modulated
3. Scanning Frequency	80-1000MHz
4. Sweep time of radiated	0.0015 Decade/s
5. Dwell Time	1 Sec.

### 8.7 Test Results

**PASS.**

Please refer to the following page.

# RF Field Strength Susceptibility Test Results


SHENZHEN SETEK TECHNOLOGY CO., LTD.

Applicant : Sunlit	Test Date : April 28,2007					
EUT : PIR Motion Detector	Temperature : 22					
M/N : ATM-40D	Humidity : 50 %					
Field Strength : 3 V/m	Criterion : A					
Power Supply : DC12V	Test Mode : Normal					
Test Engineer: Jack	Frequency Range: 80 MHz to1000 MHz					
Modulation: <input type="checkbox"/> None <input type="checkbox"/> Pulse <input checked="" type="checkbox"/> AM 1KHz 80%						
	Frequency Rang 1: 80~ 1000MHz		Frequency Rang 2:			
Steps	#	/	%	#	/	%
	Horizontal	Vertical		Horizontal	Vertical	
Front	PASS	PASS				
Right	PASS	PASS				
Rear	PASS	PASS				
Left	PASS	PASS				
Test Equipment : <ul style="list-style-type: none"> <li>1. Signal Generator : 2031 (MARCONI)</li> <li>2. Power Amplifier : 500A100 &amp; 100W/1000M1 (A&amp;R)</li> <li>3. Power Antenna : 3108 (EMCO) &amp; AT1080 (A&amp;R)</li> <li>4. Field Monitor : FM2000 (A&amp;R)</li> </ul>						
Note:						

## **9. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST**


### 9.1 Block Diagram of Test Setup

### 9.1.1. Block Diagram of the EUT



(EUT: PIR Motion Detector)

### 9.1.2. EFT Test Setup

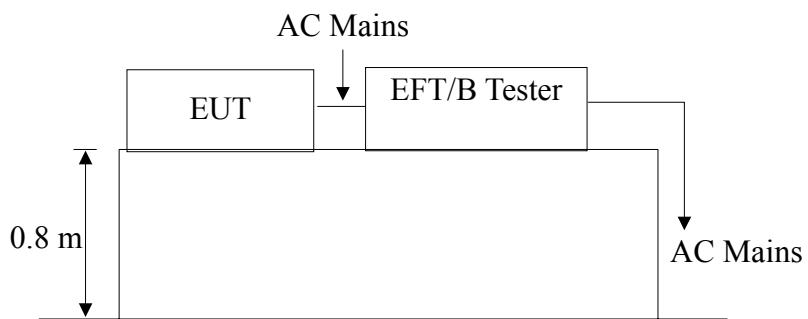

(EUT: PIR Motion Detector)

## 9.2 Test Standard

EN61000-4-4: 2004, Severity Level, Level 2: 1KV

### 9.3 Severity Levels and Performance Criterion

### 9.3.1 Severity level

Open Circuit Output Test Voltage ± 10%		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.5 KV	0.25 KV
2.	1 KV	0.5 KV
3.	2 KV	1 KV
4.	4 KV	2 KV
X	Special	Special

### 9.3.2 Performance criterion : B

## 9.4 EUT Configuration

The configuration of EUT is listed in Section 3.3.

## 9.5 Operating Condition of EUT

- 9.5.1 Setup the EUT as shown in Section 9.1.
- 9.5.2 Turn on the power of all equipments.
- 9.5.3 Let the EUT work in test mode (Normal) and measure it.

## 9.6 Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

### 9.6.1 For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

### 9.6.2 For signal lines and control lines ports:

No I/O ports. It's unnecessary to test.

### 9.6.3 For DC output line ports:

It's unnecessary to test.

## 9.7 Test Result


N/A.

N/A---Not apply.

## 10. SURGE IMMUNITY TEST


### 10.1 Block Diagram of Test Setup

#### 10.1.1 Block Diagram of the EUT



(EUT: PIR Motion Detector)

#### 10.1.2. Surge Test Setup

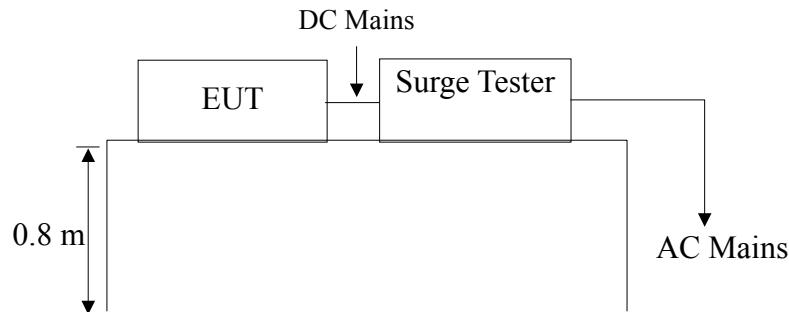

(EUT: PIR Motion Detector)

### 10.2 Test Standard

EN61000-4-5: 2001

Severity Level: Line to Line: Level 2, 1.0KV

### 10.3 Severity Levels and Performance Criterion

#### 10.3.1. Severity level

Severity Level	Open-Circuit Test Voltage KV
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

#### 10.3.2 Performance criterion : B

## 10.4 EUT Configuration

The configuration of EUT is listed in Section 3.3.

## 10.5 Operating Condition of EUT

10.5.1 Setup the EUT as shown in Section 10.1.

10.5.2. Turn on the power of all equipments.

10.5.3.Let the EUT work in test mode (Normal) and measure it.

## 10.6 Test Procedure

- 1) Set up the EUT and test generator as shown on Section 10.1.2.
- 2) For line to line coupling mode, provide a 1.0 KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 4) Different phase angles are done individually.
- 5) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

## 10.7 Test Result


**N/A.**

N/A---Not apply.

## 11. INJECTED CURRENTS SUSCEPTIBILITY TEST


### 11.1 Block Diagram of Test Setup

### 11.1.1 Block Diagram of the EUT



(EUT: PIR Motion Detector)

### 11.1.2 Block Diagram of Test Setup

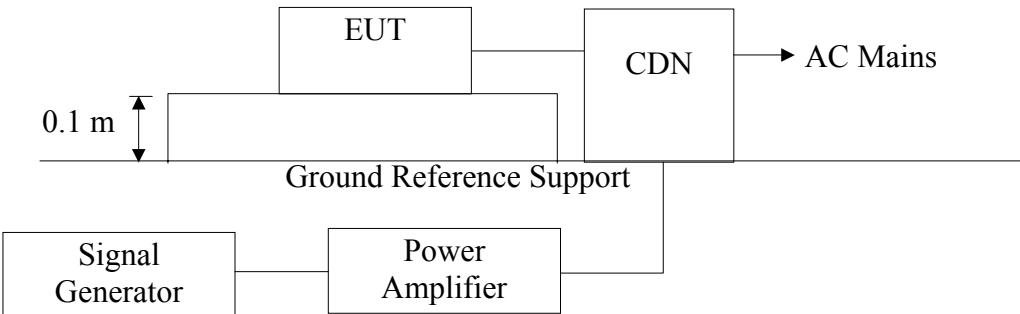

(EUT: PIR Motion Detector)

## 11.2 Test Standard

EN61000-4-6: 2001, Severity Level: Level 2, 3V (rms), (0.15MHz ~ 80MHz)

### 11.3 Severity Levels and Performance Criterion

### 11.3.1 Severity level

Level	Field Strength V
1	1
2	3
3	10
X	Special

### 11.3.2 Performance criterion: A

## 11.4 EUT Configuration

The configuration of EUT is listed in Section 3.3.

## 11.5 Operating Condition of EUT

- 11.5.1 Setup the EUT as shown in Section 11.1.
- 11.5.2 Turn on the power of all equipments.
- 11.5.3 Let the EUT work in test mode (Normal) and measure it.

## 11.6 Test Procedure

- 1) Set up the EUT, CDN and test generators as shown on Section 11.1.2.
- 2) Let the EUT work in test mode and measure it.
- 3) The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 150KHz to80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.
- 7) The rate of sweep shall not exceed  $1.5 \times 10^{-3}$  decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

## 11.7 Test Results


N/A.

N/A---Not apply.

## 12. MAGNETIC FIELD SUSCEPTIBILITY TEST


### 12.1 Block Diagram of Test

#### 12.1.1 Block diagram of test setup

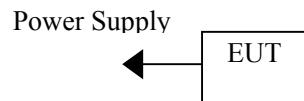

(EUT: PIR Motion Detector)

#### 12.1.2 Magnetic field test setup

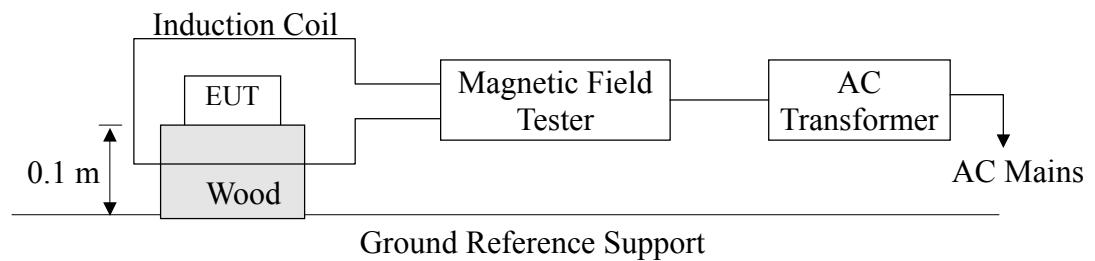

(EUT: PIR Motion Detector)

### 12.2 Test Standard

EN61000-4-8: 2001, Severity Level: Level 1, 3A / m

## 12.3 Severity Levels and Performance Criterion

### 12.3.1 Severity Levels

Level	Field Strength A/m
1	1
2	3
3	10
4	30
5	100
X	Special

### 12.3.2 Performance Criterion : A

## 12.4 EUT Configuration on Test

The configuration of the EUT is same as Section 3.3.

## 12.5 Test Procedure

The EUT is placed in the middle of a induction coil (1\*1m), under which is a 1\*1\*0.1m (high) table, this small table is also placed on a larger table, 0.8 m above the ground. Both horizontal and vertical polarization of the induction coil are set on test, so that each side of the EUT is affected by the magnetic field. Also can reach the same aim by change the position of the EUT.

## 12.6 Test Results

**PASS.**

Please refer to the following page.

# Magnetic Field Immunity Test Result

SHENZHEN SETEK TECHNOLOGY CO., LTD.

Standard	<input type="checkbox"/> IEC 61000-4-8 <input checked="" type="checkbox"/> EN 61000-4-8	Result: <input checked="" type="checkbox"/> Pass / <input type="checkbox"/> Fail
----------	--	--

Applicant : Sunlit

EUT : PIR Motion Detector M/N: ATM-40D

Input Voltage : DC12V

Date of Test : April 28,2007 Test Engineer: Jack

Ambient Condition : Temp : 22 Humid: 58%

Criterion: A

Operation Mode : Normal

Test Level (A/M)	Testing Duration	Coil Orientation	Criterion	Result
1	5 mins	X	A	PASS
1	5 mins	Y	A	PASS
1	5 mins	Z	A	PASS

Operation Mode :

Test Level (A/M)	Testing Duration	Coil Orientation	Criterion	Result


Test Equipment	Magnetic Field Test: HEAFELY MAG 100.1
----------------	--

Note:

## 13. VOLTAGE DIPS AND INTERRUPTIONS TEST


### 13.1 Block Diagram of Test Setup

#### 13.1.1 Block Diagram of the EUT



(EUT: PIR Motion Detector)

#### 13.1.2 Dips Test Setup

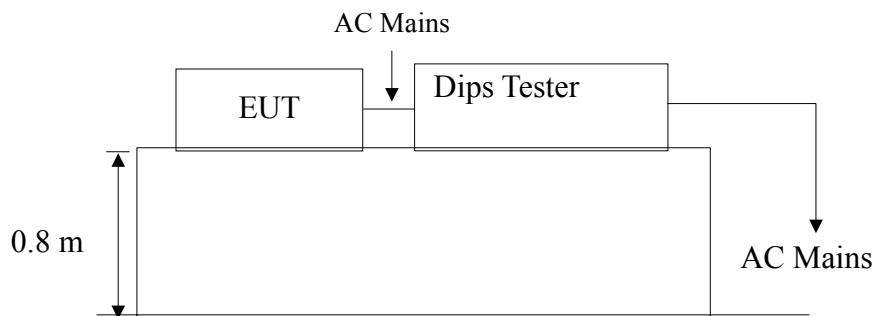

(EUT: PIR Motion Detector)

### 13.2 Test Standard

EN61000-4-11: 2004

### 13.3 Severity Levels and Performance Criterion

#### 13.3.1 Severity level

Test Level %UT	Voltage dip and short interruptions %UT	Duration (in period)
0	100	0.5
		1
40	60	5
		10
70	30	25
		50
		*

#### 13.3.2 Performance criterion : **B&C**

### 13.4 EUT Configuration

The configuration of EUT is listed in Section 3.3.

### 13.5 Operating Condition of EUT

13.5.1 Setup the EUT as shown in Section 13.1.

13.5.2 Turn on the power of all equipments.

13.5.3 Let the EUT work in test mode (Normal) and measure it.

### 13.6 Test Procedure

- 1) Set up the EUT and test generator as shown on Section 13.1.2.
- 2) The interruptions is introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

### 13.7 Test Result

**N/A.**

N/A---Not apply.

## 14. PHOTOGRAPH

### 14.1 Photo of Radiation Emission Measurement



### 14.2 Photo of Electrostatic Discharge Measurement




### 14.3 Photo of RF FIELD STRENGTH SUSCEPTIBILITY Measurement




## APPENDIX I (Photos of EUT)

**FIGURE**  
GENERAL APPEARANCE OF EUT



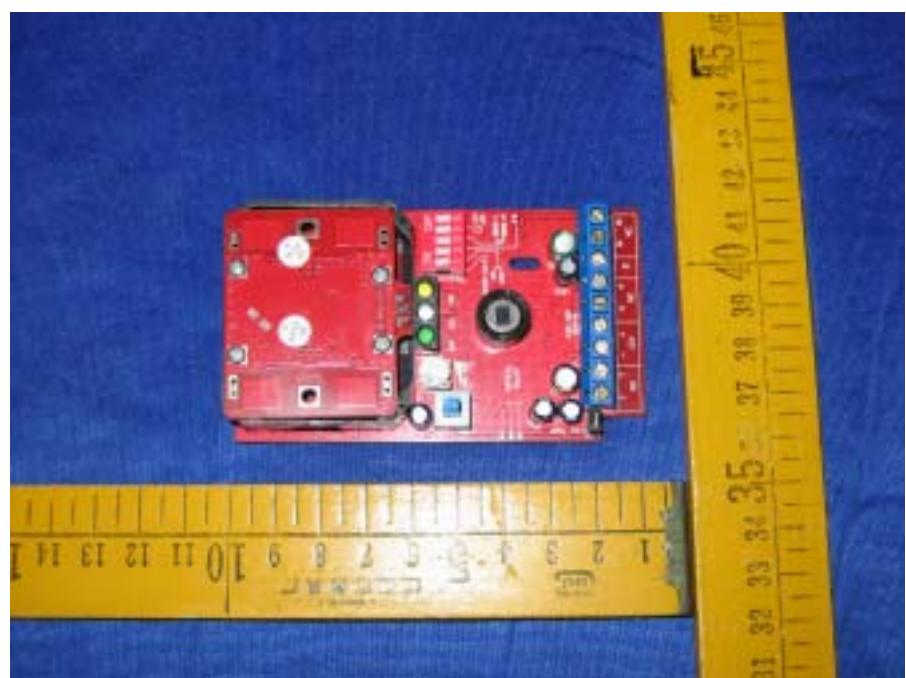

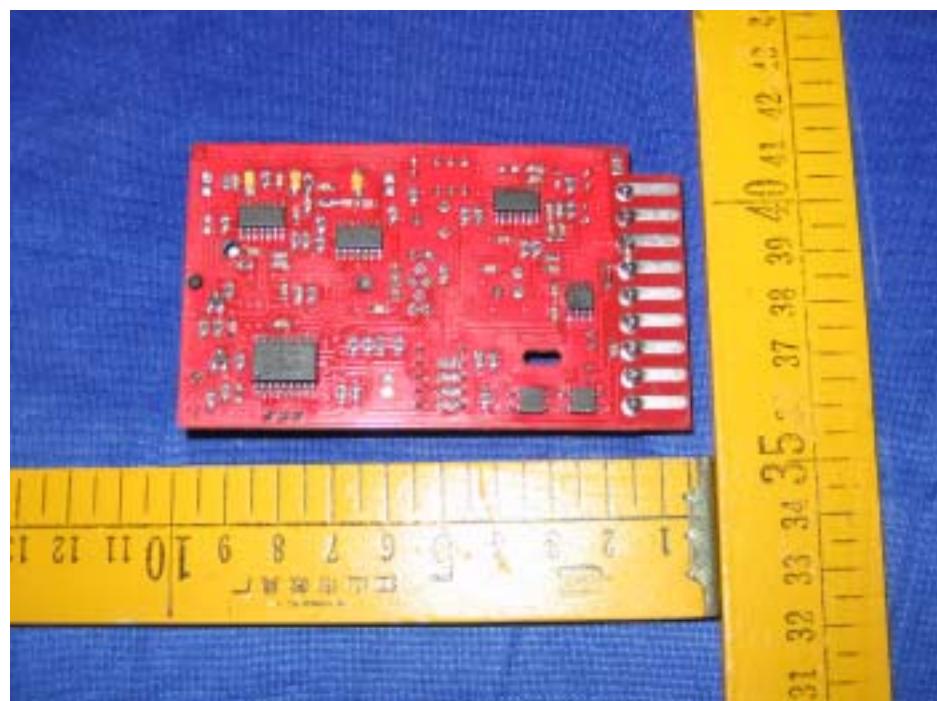

**The End**