



Fixed bollards can be used with retractable bollards for traffic landscape design or closing of appointed area. It not only can control access, but also provide the best choice for areas decoration.

Fixed bollard is easy to install, concrete casting is the best way. The recommended MAX spacing is 1.4m, the depth of excavation of 30cm.

Features

- A. Landscape Design
- B. Traffic Control
- C. Perimeter Control, vehicle control area division
- D. Permanent access control
- E. Various styles, suitable for different architecture environment

HD(mm)	89	102	114	133	168	219	273
600	O	O	O	O	O	O	O
750	O	O	O	O	O	O	O
900	O	O	O	O	O	O	O
1000	O	O	O	O	O	O	O
1200	O	O	O	O	O	O	O

Note: "D" for diameter, "H" for height, "O" for available, "X" for unavailable

Technical parameter (168*900*4):


Diameter: 168mm
 Height: 900mm
 Weight: 16.5kg
 Thickness: 4mm
 Material Embedded Depth: 300mm

Technical parameter (168*600*4mm)

Diameter: 168mm
 Height: 600mm
 Weight: 14.8kg
 Thickness: 4mm

Material option:

- A: 304 stainless steel
- B: 316 stainless steel
- C: Carbon steel with sprayed electrophoresis painting.

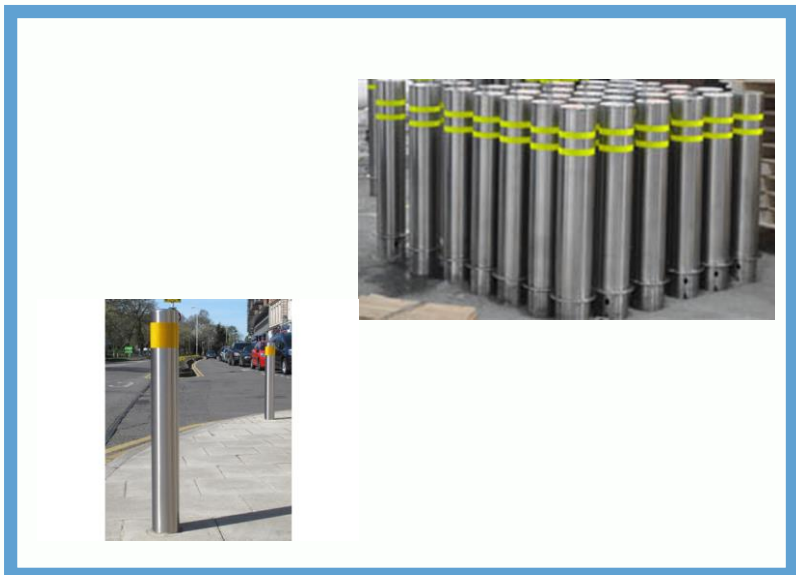

Application:

Widely used in and around at park, road, Commercial Square, etc. It also can be worked with other series bollards