

Network GI-C5 Series


HD WDR IP Camera



Add:1F., No.3 ,Lane 48,Linsen Rd., Yonghe City, Taipei 23450, Taiwan (R.O.C.)

Add:8, Chuang Xin Rd , Mawei District, Fuzhou Fujian, China

Email:angelo@getwin.com.tw

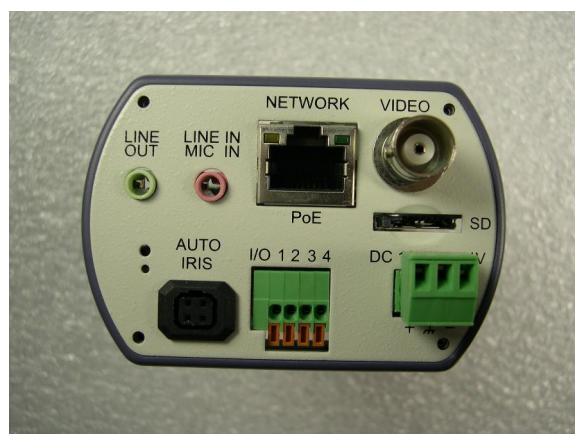

Features:

- Sony Progressive Scan CCD/CMOS sensor
- HD 720p Real-time at dual streaming
- H.264, MJPEG, and MPEG-4 compression
- Integrated Real-time WDR
- BNC analog output
- 2D / 3D Noise Reduction
- Motion Detection
- Privacy Masks
- True Day/Night (ICR)

- Micro SD support

Specification

Item	GI-C5		
Camera			
Image Sensor		1/3" Sony Progressive CCD	1/3" Sony Progressive CMOS
Picture Elements		1280(H) x 960 (V)	1280(H) x 1024 (V)
Resolution		>700 TVL	>700 TVL
Shutter Speed		1~ 1/10000 sec.	
Lens			
Lens Mount		C/CS mount Lens	
Operation			
Video Compression	H.264 Baseline/MJPEG/MPEG-4		
Video Streaming	Simultaneous H.264 + MJPEG MPEG-4 + MJPEG MJPEG + BNC		
Resolution		H.264: HD 720p / D1 / VGA / QVGA / CIF / QCIF	H.264: HD 720p / D1 / VGA / QVGA / CIF / QCIF
		MJPEG: 1280x960 / HD 720p / D1 / VGA / QVGA / CIF / QCIF	MJPEG: 1280x1024 / HD 720p / D1 / VGA / QVGA / CIF / QCIF
		MPEG-4: 1280x960 / HD 720p / D1 / VGA / QVGA / CIF / QCIF	MPEG-4: 1280x960 / HD 720p / D1 / VGA / QVGA / CIF / QCIF
Frame rate		H.264: Max 25/30fps MJPEG: Max 25/30fps MPEG-4: Max 25/30fps	
Image Setting	Brightness	Manual	
	Exposure	Auto / Manual / Fixed Shutter	
	Backlight	On/Off	
	Sharpness	Manual	
	Contrast	Manual	
	White Balance	Auto / Manual / Indoor / Outdoor	
	Digital Zoom	1x ~ 16x	
	Image Rotation	Flip, Mirror, and 180 Rotate	
	WDR	Off / 4 Level Adjustment	
	3D Noise Reduction	On/Off	
Audio	Two-way Audio	Line out, Line in/Mic in	
	Compression	G.711 / G.726	

	Input	5V 10k pull up	
Alarm	Output	Photo relay output 300VDC/AC	
Network			
Interface		10/100 Mb Ethernet (RJ-45)	
Protocol		TCP/IP, UDP, RTP, RTSP, HTTP, ICMP, FTP, SMTP, DHCP	
Password Levels		User and Administrator	
Internet Browser		Internet Explorer (6.0+)	
User Account		20	
Mechanical			
Connectors	Power	3 pins terminal block	
	Ethernet	RJ-45	
	Micro SD	SDHC support	
	Audio	Stereo phone jack, 3.5mm	
	Alarm	4 pins terminal block	
	Auto Iris	DC drive	
	Analog Video	1.0 Vp-p / 75 Ω, BNC	
LED Indicator		Power, Link, ACT	
General			
Operating Temperature		0°C ~ 50°C Humidity: 10% to 90%, no condensation	
Power Source		DC12V/PoE/AC24V	
Power Consumption		6 W	4.5 W
Regulatory		CE, FCC, RoHS Compliant	
Dimension		125 x 82 x 52 mm (L x W x H) (w/o lens)	
Weight		360 g (0.80 lb)	

Product specification and availability subject to change without notice. Certain product names mentioned herein may be trade names and / or registered trademarks of their companies.