




Economic Series 2

CCTV LCD Monitor

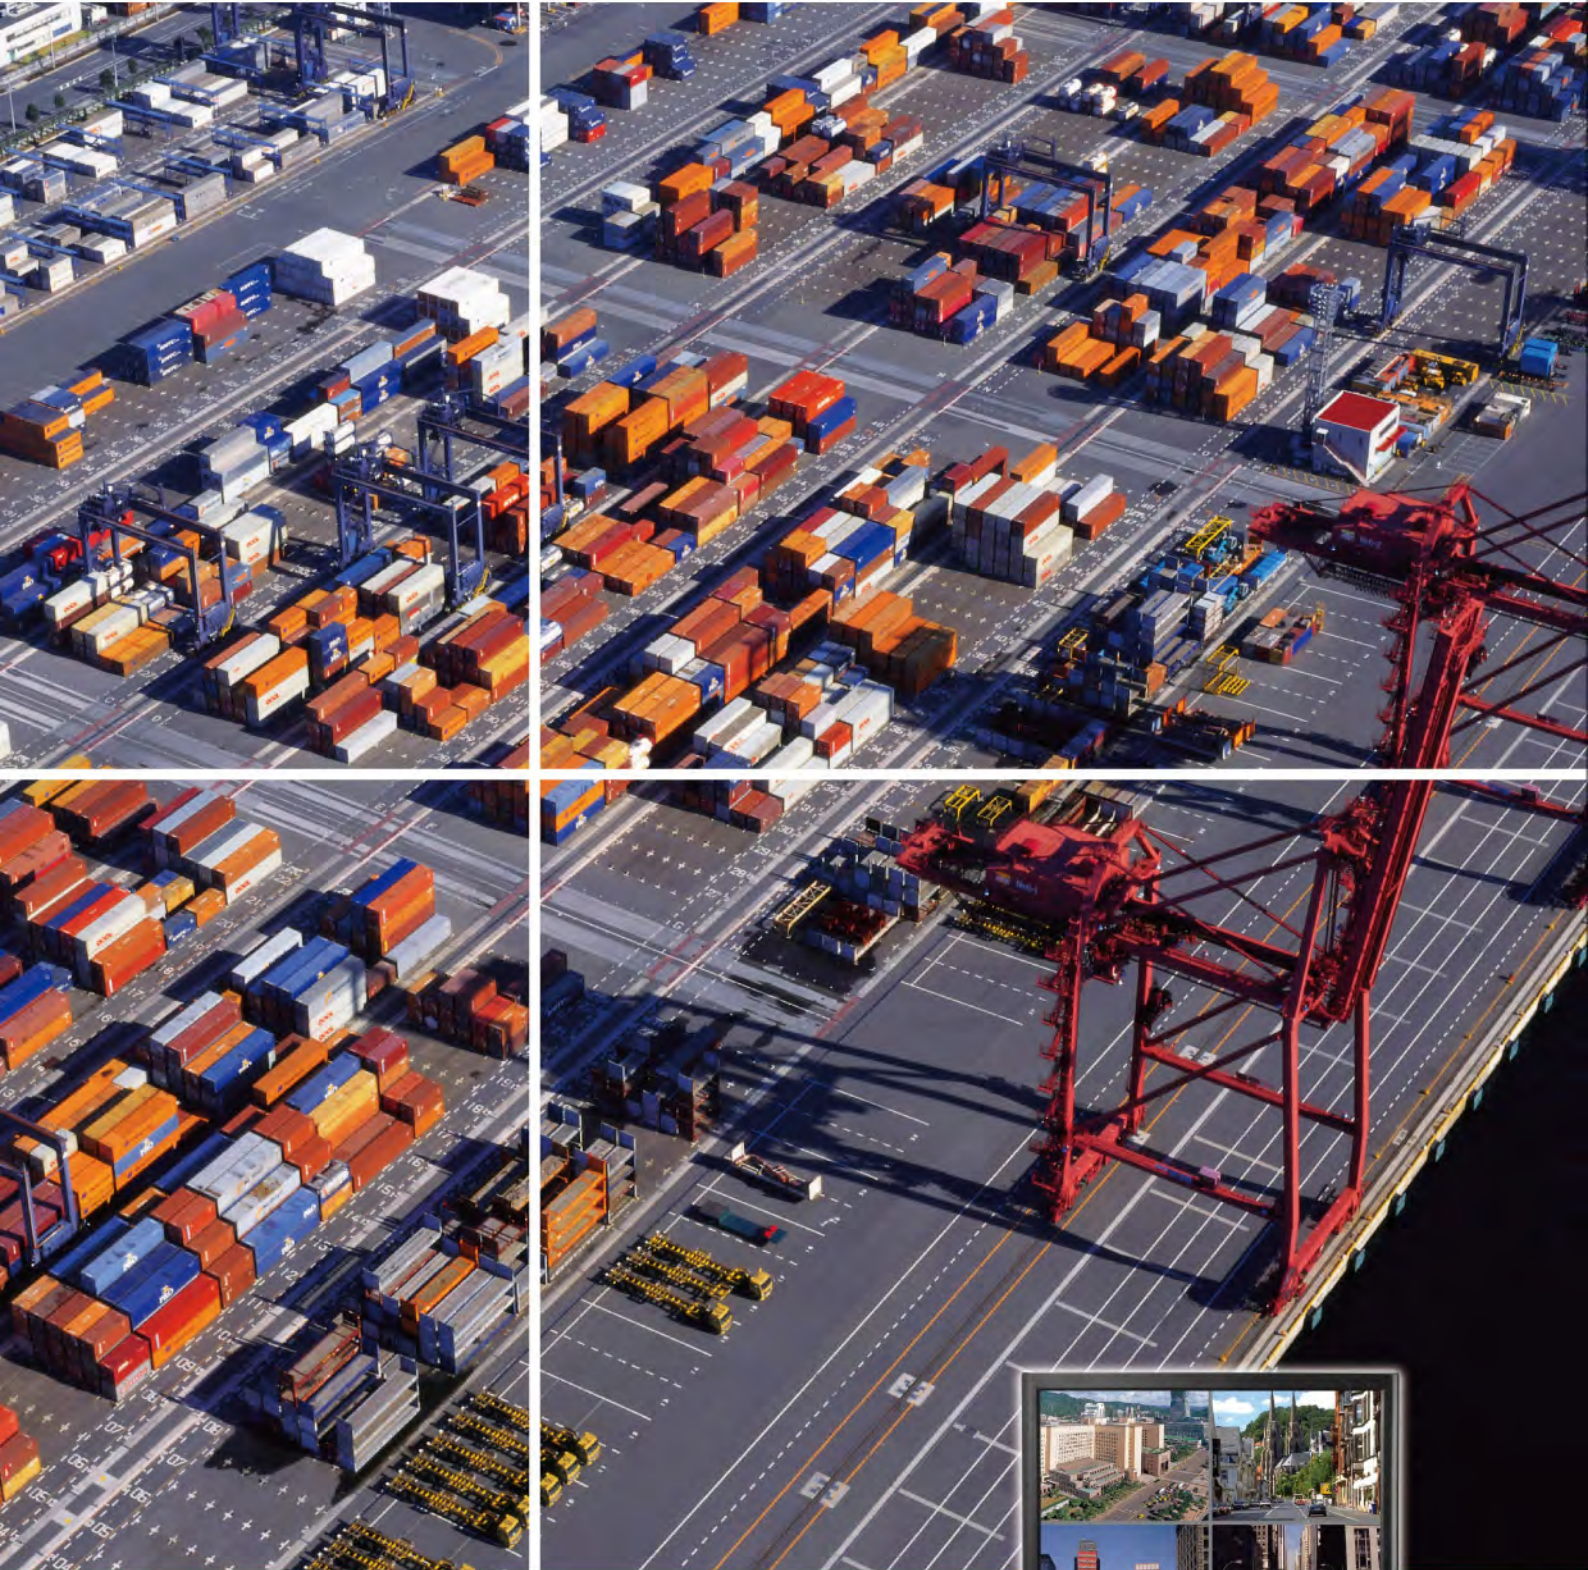

Exland CCTV LCD

Adaptor Holder

Exland provides the Adaptor Holder to hold the power adaptor on the back of monitors. The holder provides not only the storage of adaptor but also the reduction of fire risk.



VESA & Looping BNC

Exland's LCD Monitors all meet VESA mounting standard (75x75 mm or 100x100mm). It applies to all the VESA mounting brackets that are selling in the market.

Exland's LCD Monitors are also equipped with looping BNC connectors to meet CCTV's video looping applications.



Specification

Model	EX-17NBE	EX-19NBE
System		
Panel Size	17" LCD	19" LCD
Resolution	1280 x 1024	1280 x 1024
Pixel Pitch (H x V)	0.264 x 0.264	0.294 x 0.294
Contrast Ratio	1000:1	1000:1
Luminance	250 cd/m ²	250 cd/m ²
Aspect Ratio	4:3	4:3
Viewing Angle	L/R : 85/85, U/D: 75/85	L/R : 85/85, U/D: 75/85
Response Time	Tr+Tf=5 ms.	Tr+Tf=5 ms
Video Signal	Composite signal 0.6~1.0Vp-p/75 ohm, Y:1Vp-p, C:0.3Vp-p	AComposite signal 0.6~1.0Vp-p/75 ohm, Y:1Vp-p, C:0.3Vp-p
Video Color System	NTSC/PAL auto detection switch	NTSC/PAL auto detection switch
Scan Frequency	H:31K~81KHz, V:56~75Hz	H:31K~81KHz, V:56~75Hz
Operation Interferences		
Front Panel Controls	ACCEPT, MENU, POWER,+/-	ACCEPT, MENU, POWER,+/-
Indicators	LED (Power on:Green-> Standby: Orange)	LED (Power on:Green-> Standby: Orange)
OSD Control	Yes	Yes
OSD Language	English,France, Germany, Spanish,Italiano, Chinese (6)	English,France, Germany, Spanish,Italiano, Chinese (6)
Input / Output Connector		
Input Connector	D-Sub x 1, RCA Video in x 1, Video Input(BNC Jack) x 1, PC Audio Input (Ø3.5 Jack) x1, Power Input (DC 12V/5A) x 1	D-Sub x 1, RCA Video in x 1, Video Input(BNC Jack) x 2, RCA Audio x 2 (R/L) PC Audio Input (Ø3.5 Jack) x1, Power Input (DC 12V/5A) x 1
Output Connector	Video Output (BNC) x 1 (Pigtail Cable)	Video Output(BNC) x 1
Video Looping out	Yes	Yes
VESA Mounting	100 x 100 mm	100 x 100 mm
Front Bezel Material	Plastic	Plastic
Back Cabinet Material	Plastic	Plastic
Stand Material	Plastic	Plastic
Audio Power Output	2W x 2	2W x 2
Mechanical & Electrical		
Power	DC 12V/5A	DC 12V/5A
Power Consumption	25W(Max)	30W(Max)
Working Temperature	5~+40 °C	5~+40°C
Working Humidity	20% ~ 85%RH	20% ~ 85%RH
Unif Dimension(WxHxD)	394(W) x 392(H) x 172(D) mm	422(W) x 423(H) x 172(D) mm
Packing Dimension(WxHxD)	440(W) x 460(H) x 190(D) mm	470(W) x 460(H) x 175(D) mm
Net Weight	4.7 Kg	4.9 Kg
Gross Weight	6.1 Kg	6.4 Kg
Regulatory	CE,FCC,RoHS,BSMI	CE,FCC,RoHS,BSMI
Color	Black	Black
Accessory		
Power Cable	1	1
Power Adaptor	Input: AC 100~240V, 50/60Hz ; output :DC 12V, 5A	Input: AC 100~240V, 50/60Hz ; output :DC 12V, 5A
Adaptor Holder	Optional	Optional
D-Sub VGA Cable	1	1
3.5mm Audio Cable	1	1
User Manual (CD)	1	1

※Specifications and product design are subject to change without notice.

Adaptor Holder

Exland provides the Adaptor Holder to hold the power adaptor on the back of monitors. The holder provides not only the storage of adaptor but also the reduction of fire risk.



VESA & Looping BNC

Exland's LCD Monitors all meet VESA mounting standard (75x75 mm or 100x100mm). It applies to all the VESA mounting brackets that are selling in the market.

Exland's LCD Monitors are also equipped with looping BNC connectors to meet CCTV's video looping applications.



Specification

Model	EX-17NBE	EX-19NBE
System		
Panel Size	17" LCD	19" LCD
Resolution	1280 x 1024	1280 x 1024
Pixel Pitch (H x V)	0.264 x 0.264	0.294 x 0.294
Contrast Ratio	1000:1	1000:1
Luminance	250 cd/m ²	250 cd/m ²
Aspect Ratio	4:3	4:3
Viewing Angle	L/R : 85/85, U/D: 75/85	L/R : 85/85, U/D: 75/85
Response Time	Tr+Tf=5 ms.	Tr+Tf=5 ms
Video Signal	Composite signal 0.6~1.0Vp-p/75 ohm, Y:1Vp-p, C:0.3Vp-p	AComposite signal 0.6~1.0Vp-p/75 ohm, Y:1Vp-p, C:0.3Vp-p
Video Color System	NTSC/PAL auto detection switch	NTSC/PAL auto detection switch
Scan Frequency	H:31K~81KHz, V:56~75Hz	H:31K~81KHz, V:56~75Hz
Operation Interferences		
Front Panel Controls	ACCEPT, MENU, POWER,+/-	ACCEPT, MENU, POWER,+/-
Indicators	LED (Power on:Green-> Standby: Orange)	LED (Power on:Green-> Standby: Orange)
OSD Control	Yes	Yes
OSD Language	English,France, Germany, Spanish,Italiano, Chinese (6)	English,France, Germany, Spanish,Italiano, Chinese (6)
Input / Output Connector		
Input Connector	D-Sub x 1, RCA Video in x 1, Video Input(BNC Jack) x 1, PC Audio Input (Ø3.5 Jack) x1, Power Input (DC 12V/5A) x 1	D-Sub x 1, RCA Video in x 1, Video Input(BNC Jack) x 2, RCA Audio x 2 (R/L) PC Audio Input (Ø3.5 Jack) x1, Power Input (DC 12V/5A) x 1
Output Connector	Video Output (BNC) x 1 (Pigtail Cable)	Video Output(BNC) x 1
Mechanical & Electrical		
Video Looping out	Yes	Yes
VESA Mounting	100 x 100 mm	100 x 100 mm
Front Bezel Material	Plastic	Plastic
Back Cabinet Material	Plastic	Plastic
Stand Material	Plastic	Plastic
Audio Power Output	2W x 2	2W x 2
Power	DC 12V/5A	DC 12V/5A
Power Consumption	25W(Max)	30W(Max)
Working Temperature	5~+40 °C	5~+40°C
Working Humidity	20% ~ 85%RH	20% ~ 85%RH
Unif Dimension(WxHxD)	394(W) x 392(H) x 172(D) mm	422(W) x 423(H) x 172(D) mm
Packing Dimension(WxHxD)	440(W) x 460(H) x 190(D) mm	470(W) x 460(H) x 175(D) mm
Net Weight	4.7 Kg	4.9 Kg
Gross Weight	6.1 Kg	6.4 Kg
Regulatory	CE,FCC,RoHS,BSMI	CE,FCC,RoHS,BSMI
Color	Black	Black
Accessory		
Power Cable	1	1
Power Adaptor	Input: AC 100~240V, 50/60Hz ; output :DC 12V, 5A	Input: AC 100~240V, 50/60Hz ; output :DC 12V, 5A
Adaptor Holder	Optional	Optional
D-Sub VGA Cable	1	1
3.5mm Audio Cable	1	1
User Manual (CD)	1	1

※Specifications and product design are subject to change without notice.



Head Office : NO.173-8, Yung-Fong Road.
Tucheng Dist, New Taipei City 236, Taiwan, R.O.C.
TEL : 886-2-2274-6159 / FAX : 886-2-2274-2484
E-Mail : sales@exland.com.tw
Website : www.exland.com.tw

All EXLAND's products are insured with general liability and damage.