


# FAXCONT FC-607

## Camera Housing




 IP66 FC CE

### Overview

- Outdoor top open camera housing.
- Top : ABS & PC / Bottom : Aluminum / Sun-Shield : Aluminum
- Appearance Size: 157 ( W ) x 130 ( H ) x 460 ( L ) mm
- Suitable Camera Size: 108 ( W ) x 75 ( H ) x 300 ( L ) mm
- Built-in Fan & Heater (Optional)
- FEVE Coating: Endure harsh environment, prevents acid and base moisture, five years warranty. (Optional)
- IR LAMP. (Optional)
- Wireless. (Optional)
- FC-81 RJ45 Water Proof Connector. (Optional)
- POE Splitter. (Optional)

### Related Products

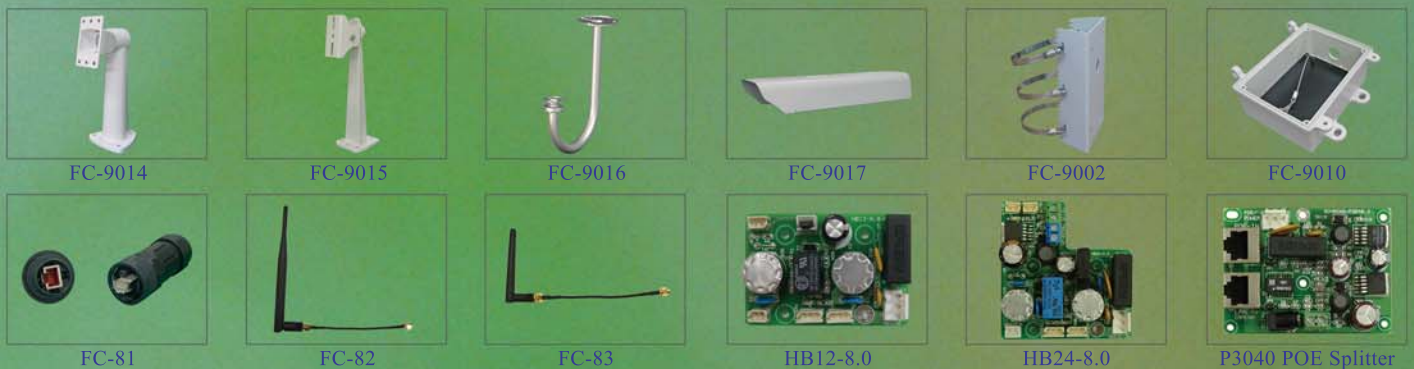

### Order Information

- FC-607 Housing
- FC-607 Plug and play Housing (With FC-81 IP68 Quick connector)
- FC-607 POE Housing
- FC-607 Wireless Housing


### Application



# FAXCONT FC-607

Camera Housing



 IP66 FC CE

## Operation temperature sensor

- Heater : 10°C ON , 20°C OFF ( $\pm 3^{\circ}\text{C}$ )
- Fan : 35°C ON , 25°C OFF ( $\pm 3^{\circ}\text{C}$ )  
Sync operation according to heater ON/OFF
- Operation temp :  $-20^{\circ}\text{C} \sim 50^{\circ}\text{C}$
- Power consumption : 20W(not include camera)

## Temperature control board (Optional)

- All series with surge & over load protector
- HB12-8.0→DC12V driver  
Total consumption no more then 60W
- HB24-8.0→input : AC24V  
Output : 1.DC12V(3A)  
2.AC24V(Looping)  
Total consumption no more then 65W
- P3040 POE splitter→input : POE in  
Output : 1.DC12V  
2.DC24V  
Total consumption no more then 30W

## Dimensions

