

A15/17/19C1-LCD CCTV

Leading the edge of security surveillance displays



▶ 3D comb filter high quality motion adaptive

3D comb filter clearly differentiates luminance signal and chrominance signal and effectively reduce flickering and noise. Therefore ensures clear contour line of image.

▶ 3D De-interlace

▶ 3D decoder

▶ 3D noise reduction

▶ 650 TVLINE Support

▶ V&H adjustable

▶ User friendly OSD interface




OSD adopts user friendly graphic interface and supports 11 languages. It is easily to set up by front panel control buttons and remote controller.

▶ Looping function

2 BNC inputs and 2 BNC outputs

PREMIUM SERIES	A15C1	A17C1	A19C1
Display			
Screen Size	15"	17"	19"
Max Resolution	1024x768	1280x1024	1280x1024
Brightness	250 cd/m ²	300 cd/m ²	300 cd/m ²
Pixel Type	Active Matrix TFT	Active Matrix TFT	Active Matrix TFT
Pixel Pitch	0.297(H) x 0.297(V)	0.264(H) x 0.264(V)	0.294(H) x 0.294(V)
Display Color	16.7 Million	16.7 Million	16.7 Million
Contrast Ratio	700:1	800:1	800:1
Aspect Ratio	4:3	4:3	4:3
Viewing Angle (H/V)	140° / 160°	160° / 160°	160° / 160°
Response Time	8ms	5ms	5ms
Video System	NTSC/PAL	NTSC/PAL	NTSC/PAL
Frequency (H)	30KHz ~ 81KHz	30KHz ~ 81KHz	30KHz ~ 81KHz
Frequency (V)	55Hz~75Hz	55Hz~75Hz	55Hz~75Hz
Interface			
Video In/Out (BNC Type)	2/2	2/2	2/2
S-video In/Out	N/A	N/A	N/A
VGA In/Out (15Pin D-Sub)	1	1	1
HDMI In	1	1	1
Audio In (RCA Type)	1	1	1
PC Stereo In	1	1	1
Audio			
Built-in speaker	Yes (1.5W x 2)	Yes (1.5W x 2)	Yes (1.5W x 2)
Special features			
3D Comb Filter	YES	YES	YES
De-Interlace	YES	YES	YES
Multi-Language	English、German、French、Italian、Spanish、Russia、Turkish、Japanese、Polish		
Key Lock Function	Optional	Optional	Optional
Dimension			
Net (WxHxD)	340x370x190(mm)	370x380x190(mm)	420x425x190(mm)
Packing(WxHxD)(1pcs/Box)	430x130x500(mm)	500x160x570(mm)	500x160x570(mm)
Weight	N.W.: 2.57kgs G.W.: 3.92kgs	N.W.: 3.24kgs G.W.: 4.92kgs	N.W.: 3.8kgs G.W.: 5.5kgs
Cumstance			
Operating Temperature	0° ~ 40°C	0° ~ 40°C	0° ~ 40°C
Storage Temperature	-10° ~ 60°C	-10° ~ 60°C	-10° ~ 60°C
Humidity	10% ~ 90%	10% ~ 90%	10% ~ 90%
Cabinet			
Finish/Tilt Stand	Black/Yes		
Mount			
Visa Mounts Size	75mm x 75mm	75mm x 75mm	75mm x 75mm
Wall	Optional	Optional	Optional
Ceiling	Optional	Optional	Optional
Rack	Optional	Optional	Optional
Power			
Electrical Ratings	DC12V (AC100~240 [50 / 60])		
Consumption < On	35W Max	35W Max	35W Max
Regulations	FCC-DOC, CE, ROHS		
* Design and Specs are subject to change without any notice			

Dimension

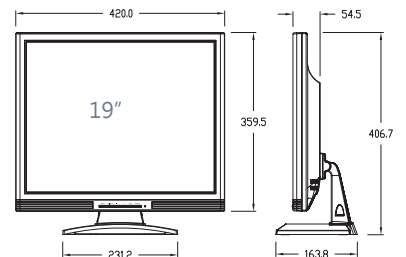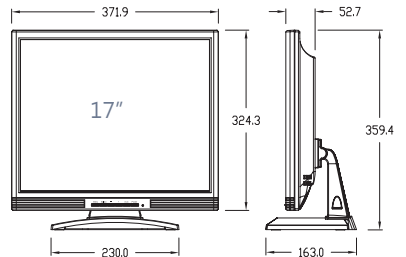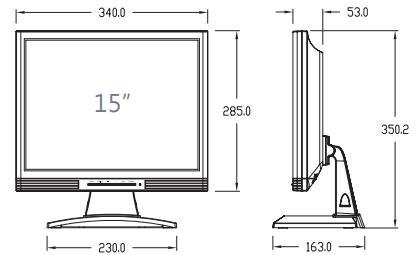

Auspice Star