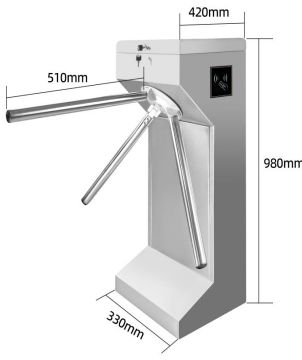










Shenzhen HPT Intelligent Technology Co., Ltd

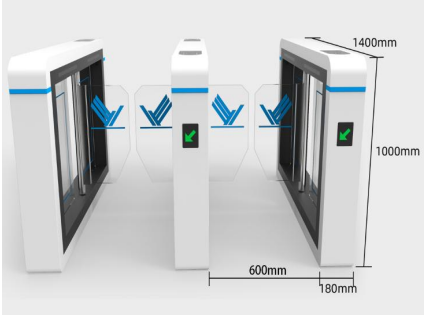
Product	Vertical Tripod Turnstile		
	Specification		Model
	Product Size	420*330*980mm	AG-PX13423302
	Material	SUS 304 stainless steel	
	Material Thickness	Top:1.2mm+body1.0mm	
	Throughput Rate	30p/m	
	Pass Width	550mm	
	Passage Direction	Single directional/Bi-directional	
	Throughput Rate	30p/m	
	Reaction Time	0.2S	
	Driving Voltage	DC24V 3A	
	Working Temperature	-20~+70℃	
	Driving Mode	Semi-auto	
	Indication	LED direction indication	

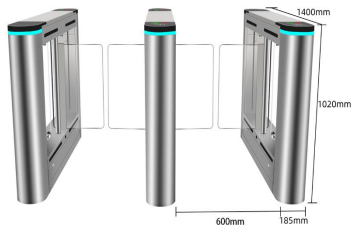
Product	Tripod Turnstile		
	Specification		Model
	Product Size	1200*280*980mm	AG-PX11122802
	Material	SUS 304 stainless steel	
	Thickness	Top:1.2mm+body1.0mm	
	Pass Width	550mm	
	Passage Direction	Single directional/Bi-directional	
	Throughput Rate	30p/m	
	Reaction Time	0.2S	
	Driving Voltage	DC24V 3A	
	Working Temperature	-20~+70℃	
	Driving Mode	Semi-auto	
	Indication	LED direction indication	

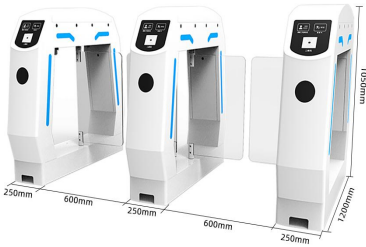
Product	Tripod Turnstile		
	Specification		Model
	Product Size	1200*280*980mm	AG-PX11122801
	Material	SUS 304 stainless steel	
	Thickness	Top:1.2mm+body1.0mm	
	Pass Width	550mm	
	Passage Direction	Single directional/Bi-directional	
	Throughput Rate	30p/m	
	Reaction Time	0.2S	
	Driving Voltage	DC24V 3A	
	Working Temperature	-20~+70℃	
	Driving Mode	Semi-auto	
	Indication	LED direction indication	

Product			
	Flap Barrier Turnstile		
	Specification		Model
	Product Size	1200*280*960mm	AG-PX21122802
	Material	SUS 304 stainless steel	
	Thickness	Top:1.2mm+body1.0mm	
	Passage Direction	Single directional/Bi-directional	
	Passage Width	550MM	
	Sensor	3 pairs of active infrared intrusion detector	
	Throughput Rate	30p/m	
	Reaction Time	0.2S	
	Driving Voltage	DC24V 4.2A	
	Working Temperature	-20~+70℃	
	Motor	Brushed DC Motor	
	Mechanism	Half Height Flap Gate Mechanism	
	Back up power	Supercapacitor ( 12V/3A)	
Indication	LED direction indication		
LED	Single color LED		
Product			
	Swing Turnstile		
	Specification		Model
	Product Size	1200*280*960mm	AG-PX31122802
	Material	SUS 304 stainless steel	
	Thickness	Top:1.2mm+body1.0mm	
	Pass Width	600mm	
	Passage Direction	Single directional/Bi-directional	
	Sensor	4 pairs of active infrared intrusion detector	
	Throughput Rate	30p/m	
	Reaction Time	0.2S	
	Driving Voltage	DC24V 6.25A	
	Working Temperature	-20~+70℃	
	Motor	Brushless DC Motor	
	Mechanism	Brushless Anti-collision Integrated Mechanism	
	Back up power	Supercapacitor ( 12V/3A)	
Indication	LED direction indication		
Acoustic Alarm	Buzzer Alarm		

Product		Swing Turnstile		
	<b>Specification</b>		<b>Model</b>  AG-PX36121802	
	Product Size	1200*185*980mm		
	Material	SUS 304 stainless steel		
	Thickness	Top:1.5mm+body1.0mm		
	Passage Direction	Single directional/Bi-directional		
	Passage Width	600mm		
	Sensor	4 pairs of active infrared intrusion detector		
	Throughput Rate	25~30p/m		
	Reaction Time	0.2S		
	Driving Voltage	DC24V 6.25A		
	Working Temperature	-20~+70℃		
	Motor	Brushless DC Motor		
	Mechanism	Brushless Anti-collision Integrated Mechanism		
	Back up power	Supercapacitor ( 12V/3A)		
	Indication	LED direction indication		
	Acoustic Alarm	Buzzer Alarm		
LED	Triple Color LED			
Product		Flap Barrier Turnstile		
	<b>Specification</b>		<b>Model</b>  AG-HX27143002	
	Product Size	1400*300*1000mm		
	Material	SUS 304 stainless steel		
	Thickness	Top:1.5mm+body1.2mm		
	Passage Direction	Single directional/Bi-directional		
	Passage Width	550mm		
	Sensor	3 pairs of active infrared intrusion detector		
	Throughput Rate	30~35p/m		
	Reaction Time	0.2S		
	Driving Voltage	DC24V 6.25A		
	Working Temperature	-20~+70℃		
	Motor	Brushless DC Motor		
	Mechanism	Half Hight Flap Gate Mechanism		
	Back up power	Supercapacitor ( 12V/3A)		
	Indication	LED direction indication		
	Acoustic Alarm	Buzzer Alarm		
LED	Triple Color LED			


Product		
Product	Swing Turnstile	
	Specification	Model
	Product Size	1400*180*1000mm
	Material	SPCC
	Thickness	1.2mm
	Passage Direction	single directional/Bi-directional
	Passage Width	600mm
	Sensor	4 pairs of active infrared intrusion detector
	Throughput Rate	25~30p/m
	Reaction Time	0.2S
	Driving Voltage	DC24V 6.25A
	Working Temperature	-20~+70℃
	Motor	Brushless DC Motor
	Mechanism	Brushless Anti-collision Integrated Mechanism
	Back up power	Supercapacitor ( 12V/3A)
	Indication	LED direction indication
	Acoustic Alarm	Buzzer Alarm
	LED	Triple Color LED
		AG-HX35141802

Product		
Product	Swing Turnstile	
	Specification	Model
	Product Size	1400*185*1020mm
	Material	SUS 304 stainless steel
	Thickness	Top:1.5mm+body1.2mm
	Passage Direction	Single directional/Bi-directional
	Passage Width	600mm
	Sensor	4 pairs of active infrared intrusion detector
	Throughput Rate	25~30p/m
	Reaction Time	0.2S
	Driving Voltage	DC24V 6.25A
	Working Temperature	-20~+70℃
	Motor	Brushless DC Motor
	Mechanism	Brushless Anti-collision Integrated Mechanism
	Back up power	Supercapacitor ( 12V/3A)
	Indication	LED direction indication
	Acoustic Alarm	Buzzer Alarm
	LED	Triple Color LED
		AG-HX36141802


Product		Swing Turnstile		
	Specification		Model	
	Product Size	1200*250*1050mm		AG-TX38152502
	Material	SPCC		
	Thickness	1.2mm		
	Passage Direction	Single directional/Bi-directional		
	Passage Width	600mm		
	Sensor	4 pairs of active infrared intrusion detector (JT)		
	Reaction Time	0.2S		
	Throughput Rate	20~25p/m		
	Working Temperature	-20~+70℃		
	Driving Voltage	DC24V		
	Motor	Brushless DC Motor		
	Mechanism	Brushless Anti-collision Integrated Mechanism		
	Indication	LED direction indication		
	Acoustic Alarm	Buzzer Alarm		
	Back up power	Supercapacitor (12V/3A)		

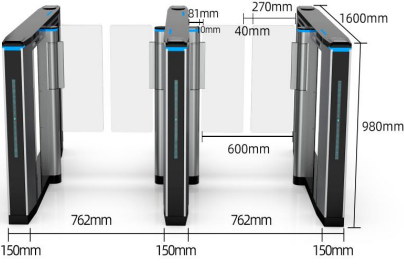
Product		Speed Turnstile		
	Specification		Model	
	Product Size	1500*100*1000mm		AG-HX65151002
	Material	SUS 304 stainless steel		
	Thickenss	Top:1.5mm+body1.2mm		
	Passage Direction	Single directional/Bi-directional		
	Passage Width	600mm		
	Sensor	4 pairs of active infrared intrusion detector		
	Throughput Rate	40p/m		
	Reaction Time	0.2S		
	Driving Voltage	DC24V 6.25A		
	Working Temperature	-20~+70℃		
	Motor	Brushless DC Motor		
	Mechanism	Brushless Speed Gate Mechanism		
	Back up power	Supercapacitor (12V/3A)		
	Indication	LED direction indication		
	Acoustic Alarm	Buzzer Alarm		
LED	Triple Color LED			

**Speed Turnstile**

Product	Speed Turnstile		
	Specification		Model
	Product Size	1500*120*1000mm	AG-TX65151202
	Material	SUS 304 stainless steel; vacuum plating	
	Thickenss	1.2mm	
	Passage Direction	Single directional/Bi-directional	
	Passage Width	600mm	
	Sensor	4 pairs of active infrared intrusion detector	
	Throughput Rate	40p/m	
	Reaction Time	0.2S	
	Driving Voltage	DC24V 6.25A	
	Working Temperature	-20~+70℃	
	Power Input	AC220V,50Hz	
	Motor	Brushless DC Motor	
	Mechanism	Brushless Speed Gate Mechanism	
	Back up power	Supercapacitor ( 12V/3A)	
Acoustic Alarm	Buzzer Alarm		
LED	Triple Color LED		

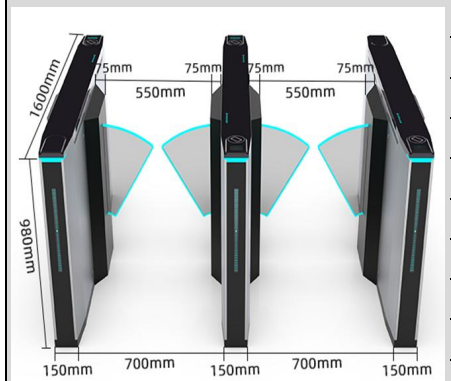
**Sirius**

Product	Tripod Turnstile		
	Specification		Model
	Product Size	1600*245*980MM	AG-TX18162402
	Material	SUS 304 stainless steel +SPCC	
	Passage Direction	Single-directional/Bi-directional	
	Standard Channel Width	550mm	
	Throughput Rate	30p/m	
	Driving Voltage	DC24V 3A	
	Working Temperature	-20~+70℃	
	Power Input	AC220V,50Hz	
	Thickenss	1.2mm	
	Driving Mode	Semi-auto	
	LED	Dual color LED	

Product	Speed Gate		
	Specification	Model	
	Product Size	single wing:1600*231*980mm dual wing: 1600*312*980mm	AG-TX68162302
	Material	SUS 304 stainless steel; vacuum plating	
	Thickness	Top:1.2mm+body1.2mm	
	Passage Direction	Single directional/Bi-directional	
	Standard Channel Width	600mm	
	Sensor	4 pairs of active infrared intrusion detector (JT)	
	Throughput Rate	40p/m	
	Reaction Time	0.2S	
	Driving Voltage	DC24V 6.25A	
	Working Temperature	-20~+70℃	
	Power Input	AC220V,50Hz	
	Motor	Brushless Servo Motor	
	Mechanism	Brushless Speed Gate Mechanism	
	Back up power	Supercapacitor (12V/3A)	
	Acoustic Alarm	Buzzer Alarm	
	LED	Triple Color LED	

Product	Swing Turnstile		
	Specification	Model	
	Product Size	1600*150*980mm	AG-TX38161502
	Material	SUS 304 stainless steel	
	Thickness	Top:1.2mm+body1.2mm	
	Passage Direction	Single directional/Bi-directional	
	Standard Channel Width	600mm	
	Sensor	4 pairs of active infrared intrusion detector (JT)	
	Throughput Rate	25~30p/m	
	Reaction Time	0.2S	
	Driving Voltage	DC24V 6.25A	
	Working Temperature	-20~+70℃	
	Power Input	AC220V,50Hz	
	Motor	Brushless DC Motor	
	Mechanism	Brushless Anti-collision Integrated Mechanism	
	Back up power	Supercapacitor (12V/3A)	
	Acoustic Alarm	Buzzer Alarm	
	LED	Triple Color LED	

**Product**



**Flap Gate**

Specification		Model
Product Size	1600*300*980mm	AG-TX28161502
Material	SUS 304 stainless steel	
Thickness	Top:1.5mm+body1.2mm	
Passage Direction	Single directional/Bi-directional	
Standard Channel Width	550mm	
Sensor	4 pairs of active infrared intrusion detector (JT)	
Throughput Rate	30~35p/m	
Reaction Time	0.2S	
Driving Voltage	DC24V 4.2A	
Working Temperature	-20~+70℃	
Power Input	AC220V,50Hz	
Motor	Brushless DC Motor	
Mechanism	Full Height Flap Gate Mechanism	
Back up power	Supercapacitor ( 12V/3A)	
Acoustic Alarm	Buzzer Alarm	
LED	Triple Color LED	

**Other**

Service	
Shipment	To be determined
Installaion	User manual + remote technical support
Warranty	One year warranty for motherborad and motor and life time
Technical Support	24 Hrs one to one remote technical support