



WIRELESS CURTAIN INFRARED DETECTOR



Wireless Curtain Infrared Detector

AH-408

- Advanced signal analysis processing technology; strong detection and anti-false alarm ability
- When intruder walks into monitoring area, once the detector detects movements, it will send alarm signal to alarm control panel
- Ultra-thin curtain; the owner has a wider and more free activity space
- Anti-strong light and wind, able to be used in the washroom, kitchen or aisle where air flows frequently
- Temperature compensation technology
- Battery under voltage alarm indicate
- Alarm delay selectable
- Advanced Ultra-low Power circuit design
- Detection range: 2-4m, 4-9m, 9-12m selectable
- Anti-RFI :(20v/m-1ghz
- SMT craft; anti-EMI

WIRELESS WIDE-ANGLE INFRARED DETECTOR



Wireless wide-angle infrared detector

AH-508

- Adopt the most advanced intelligent logic IC and high-performance sensor.
- Unique smart high intelligence operation program, prevent false alarm, high stability.
- Built-in peculiar photosensitive component, super anti-white light function
- Detecting distance: 12m
- Detecting angle: Horizontal 110°vertical 60°
- Transmitting frequency: 315MHz/433MHz
- Transmitting distance: 100m (in the open air)
- Standby current: $\leq 60\mu A$
- Alarm current: $\leq 20\mu A$
- Battery voltage:DC 9V



PET-IMMUNE LOW POWER INFRARED DETECTOR



Pet-immune Low Power Infrared Detector

AH-509

- Simple and elegant design
- Non- linear optical technology, Fuzzy Logic technology
- Strong anti-light and anti-EMI ability, low false alarm
- High performance transmitter module
- Long transmitter distance and long battery life span
- Operating Voltage: DC9V
- Frequency: 315MHz/433MHz
- Transmitter distance: 100 meters(in the open air)
- Detection distance: 12m
- Detection angle: Horizontal 110°, Vertical 60°

WIRELESS SMOKE DETECTOR



Wireless smoke detector

AH-5198B

- Applications: Widely used in home, office, commercial area and other place of security. Alarm when it detects smoke. Secure your life and property.
- Features: Detector adopts special chips intelligent control system, self-testing, stable and reliable.
- Transmitting distance: 80m.
 - Battery voltage: DC9V
 - Standby current: $\leq 10\text{mA}$
 - Temperature: $-5^{\circ}\text{C}\sim 50^{\circ}\text{C}$
 - Humidity: 10%~90%RH
 - Executive standard: UL217
 - 3.2 per foot weak soot can react the smoke detector.



WIRELESS GAS LEAK DETECTOR



Wireless Gas Leak Detector

AH-5168

- Employing Japanese sensor, chip intelligent control, high stability
- Compatible with our company or other brand alarm system
- Applied to detect combustible gas, such as natural gas, artificial coal gas, liquefied petroleum gas
- Suitable for home, gas station, ect
- Working voltage: AC220V
- Standby current: $\leq 40\text{mA}$
- Alarm current: $\leq 100\text{mA}$
- Working temperature: -10° to 50°
- Ambient humidity: 95%RH
- Alarm decibel: $\geq 70\text{dB/m}$
- Alarm density: $10\% \pm 5\% \text{LEL}$

WIRELESS DOOR CONTACT




Wireless door contact

AH-304

- The door contact is single spring tube structure, adapting to different windows and doors,
- Compact, easy to install,
- Transmitting distance : 100 meters (in the open air).
- Temperature: $-10 \sim 50^{\circ}\text{C}$
- Humidity: $\leq 95\text{RH}$
- Exterior Dimension: $90\text{mm} \times 55\text{mm} \times 22\text{mm}$
- Weight (without battery) : 30g



WIRELESS SHUTTERS DOOR MAGNETIC

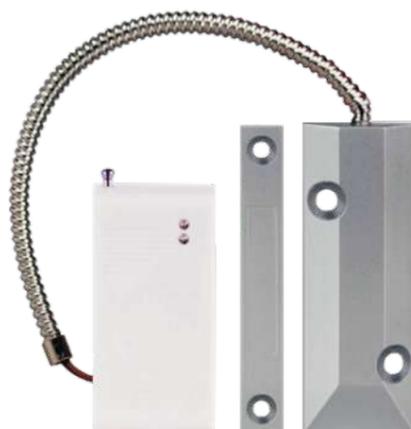

Wireless Shutters Door Magnetic

AH-301

- Suitable for shop, store, super markets
- When somebody opens the roller shutter door 2 ~ 3 cm, it will send alarm signal to the control panel.
- Working voltage: DC12V
- Detection range: 100 meters(in the open air)
- Action distance: 15mm
- Static current: $\leq 0.5\text{Ua}$
- Alarm current: $\leq 10\text{m A}$

WIRELESS EMERGENCY BUTTON



Wireless emergency button

AH-305

- Applied to emergency help situation
 - Transmitting distance: 80m(in the open air)
- Battery voltage: DC 12V
- Exterior dimensions: 90mm*55mm*22mm



WIRELESS REMOTE CONTROLLER



Wireless remote controller

AL-25

- Elegant design, metal material
- Frequency distance: 30~50m(in the open air)
- Four key function: arm, disarm,emergency,bypass
12V/23A battery (easy to change)
- Adopt 1527 code, decrease the rate of identical code

WIRELESS SIREN



Wireless Siren

AH-702

- Tamper design
- ABS fireproof material
- Signal control, the flash and sound have positive or negative trigger signal, flashing lights is about 65 beats / min.
- Alarm decibel: 110 dB
- Shell: ABS fireproof material
- Lamp color: Red
- Installation: wall mounted
- Operation voltage: DC6-15V
- Working voltage: DC12V
- Current: 300mA
- Exterior dimension: 210mm*130mm*78 mm