


# LCD CCTV MONITOR - 26" 32" 42"

PROFESSIONAL METAL CASE

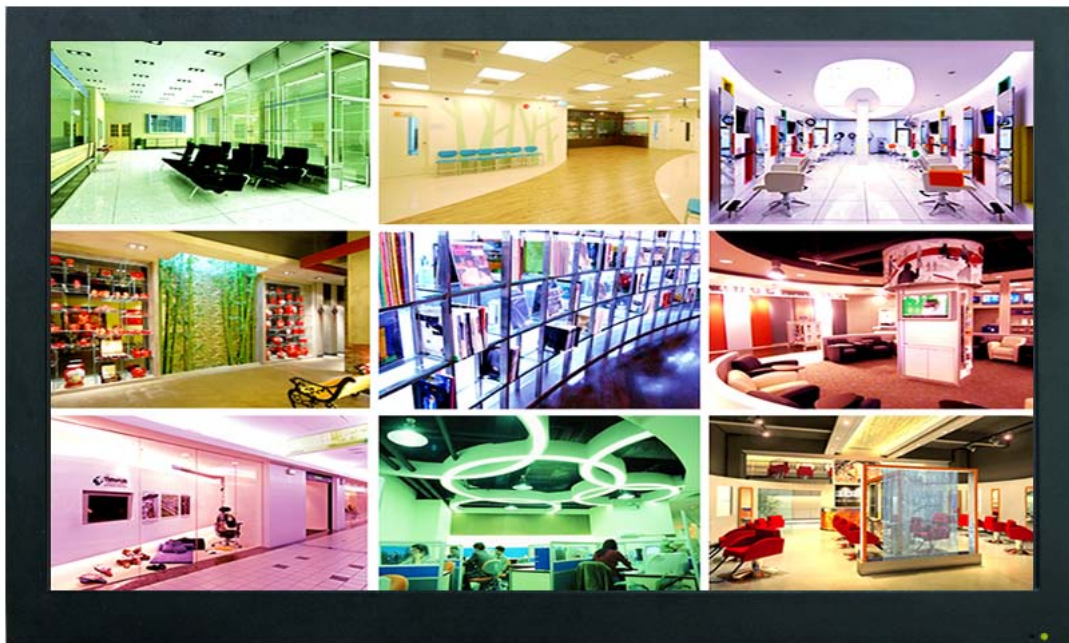

## 3D comb filter high quality motion adaptive

3D comb filter clearly differentiates luminance signal and chrominance signal and effectively reduce flickering and noise. Therefore ensures clear contour line of image.

## 3D De-Interlace

## 3D decoder

## 3D noise reduction

## Vertical & horizontal position adjustable

## User friendly OSD Interface

OSD adopts user friendly graphic interface and supports 11 languages. It is easily to set up by front panel control buttons and remote controller.

## Looping function

2 BNC inputs and 2 BNC outputs

## IR Remote Control

## Metal housing agiants vadalism




## Specifications:

METAL SERIES	A26M1-4D	A32M1-4D	A42M1-4D
<b>Display</b>			
Screen Size	26"	32"	42"
Max Resolution	1920 x 1200	1366x768	1920x1080
Brightness	400cd/m <sup>2</sup>	420cd/m <sup>2</sup>	500cd/m <sup>2</sup>
Contrast Ratio	1000:1	1000:1	4000:1
Aspect Ratio	16:10	16:9	16:9
Viewing Angle (H/V)	160° / 160°	170° / 170°	178° / 178°
Response Time	5ms	14ms	6ms
Video System	NTSC/PAL	NTSC/PAL	NTSC/PAL
<b>Interface</b>			
Video In/Out (BNC Type)	2/2	2/2	2/2
VGA In/Out (15Pin D-Sub)	1	1	1
HDMI In	1	1	1
Audio In (RCA Type)	1	1	1
PC Stereo In	1	1	1
<b>Audio</b>			
Built In speaker	Yes [1.5W x 2]	Yes [1.5W x 2]	Yes [1.5W x 2]
<b>Special Features</b>			
Filter Type	3D Comb filter/De-Interlace	3D Comb filter/De-Interlace	3D Comb filter/De-Interlace
Video resolution(Max)	650 TV line	650 TV line	650 TV line
Multi-Language	English、German、French、Italian、Spanish、Russia、Turkish、Japanese、Polish		
<b>Dimension</b>			
Net (WxHxD)	587x390x99(mm)	765x464x106(mm)	990x590x105(mm)
Weight	N.W.: 8.8kgs G.W.: 11.3kgs	N.W.: 14.6kgs G.W.: 18.2kgs	N.W.: 27.7kgs G.W.: 31kgs
<b>Circumstance</b>			
Operating Temperature	0° ~ 40°C		
Storage Temperature	-10° ~ 60°C		
Humidity	10% ~ 90%		
<b>Mount</b>			
Wall Mounts Size	200 x 100 (mm)	200 x 100 (mm)	300 x 200 (mm)
Wall Mount	Optional / A420	Optional / A422	Optional / A422
<b>Power</b>			
Electrical Ratings	AC100-240 [ 50/60 Hz ]		
Consumption < On	100W Max	120W Max	240W Max
Regulations	FCC-DOC, CE, ROHS		

\* Design and Specs are subject to change without any notice

## Dimension

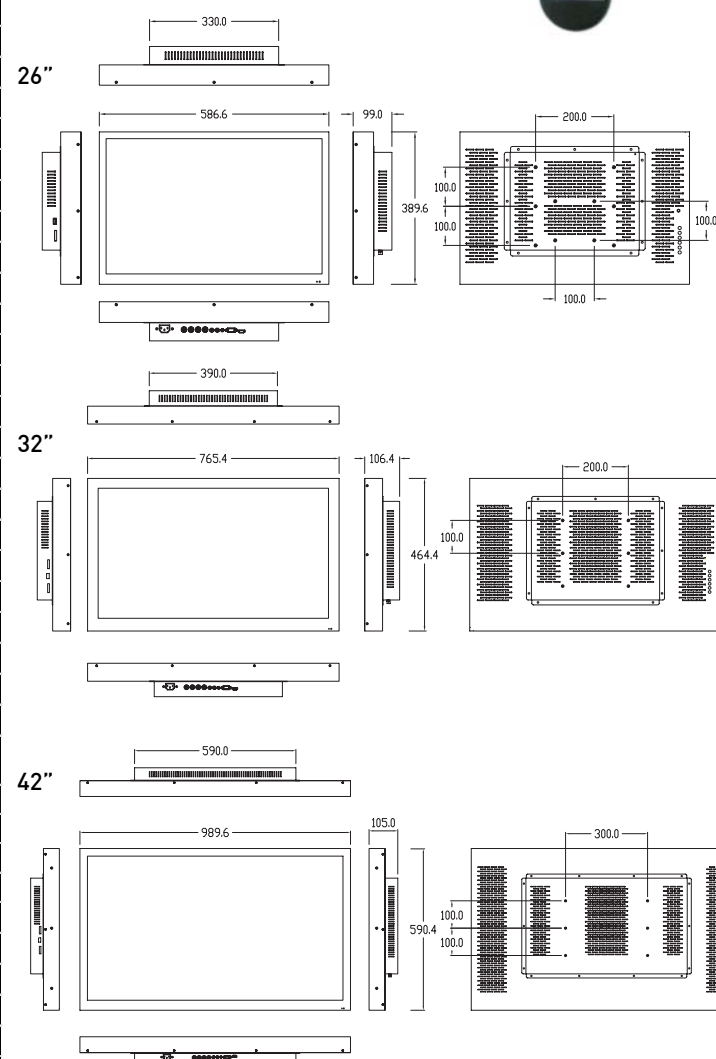

**AUSPICE STAR**

www.auspiciestar.com