Serial Converter - DIO Controller - Accessories

Relay Box - Wiegand Reader - RS485 Reader

	BF-50	Relay Box for exit button, door sensor, lock, wiegand reader BF-50 can store extra 50 sets of card numbers for backup
	WR Wiegand Reader SR RS485 Reader Weatherproof	Structure : Wiegand or RS485 (RFID card only) Type : E = EM125Khz, M=13.56MHz Case : Narrow = 1 or Wide = 2 ; Color : Silver or Black
	WR-E3/M3/H3 Wiegand Reader Weatherproof	Structure : Wiegand (RFID card only) Type : E = EM125Khz, M=Mifare13.56MHz, H=HID125KHz Size : 88 x 88 x 18 mm
	WR-M5	
	Webpass Lite IP65 Wiegand Reader	Structure : Wiegand (Card+Pin) Type : E = EM125Khz, M=Mifare13.56MHz, H=HID125KHz

Zone Management Digital Input & Output Controller

	BF-1010 BF-2300	BF-1010 : 10 DI and 10 DO (Master&Slave structure) BF-2300 : 12 DI and 6 DO
	CYT-133SC CYT-133GC (3G)	CYT-133SC : 3 DI and 3 DO CYT-133GC : 3G version

Serial to TCP/IP Converter & Modules

	CYT-100MG Modbus Gateway	Modbus TCP to Modbus RTU/ASCII data transmission
	CYT-100SC (1 COM) CYT-200SC (2 COM)	Two directions data transmission between serial and TCP/IP. Serial port type selectable. Auto detect RS232 / 422 / 485
	BF-430 (RS232 / 485) BF-431 (RS232 / 422)	Two directions data transmission between serial and TCP/IP. Serial port type selectable.
	ATC-101 (RS422 / 232) ATC-106 (RS485 / 232) BF-850 (RS485 / 422)	ATC-101: RS422 signal to RS232 ATC-106 : RS485 signal to RS232 BF-850 : USB type, RS485 signal to RS422
	BF-450M BF-440M BF-480M	BF-450M : 1 TTL, 1 COM BF-440M : 4 TTL, 4 COM BF-480M : 8 TTL, 8 COM

Accessories

	BioMini SFM-5020	BioMini : USB fingerprint scanner SFM-5020 : fingerprint module (module board + sensor)
	EM302 / MF302 MR303U MR6061U	EM302 / MF302 : EM card decoder / Mifare card decoder MR303U : Mifare card encoder / decoder MR6061U : UHF card decoder
	Card / Tag Wristband / Label	EM, TM, Mifare, HID, UHF
	UL-275 LK-1201A HM-K29	UL-275 : Magnetic Lock LK-1201A : Bolt Lock, Embedded type HM-K29 : Bolt Lock, Exposure type
	ABK-806A/B ABK-800A/B	ABK-806A/B : Infared Sensor Exit Button ABK-800A/B : Exit Button A = narrow case , B = wide case

CSS

CHIYU SMART SECURITY

ACCESS CONTROL SYSTEM

TIME ATTENDANCE SYSTEM

VIDEO MANAGEMENT SYSTEM

CLIENT SYSTEM

MONITOR SYSTEM

LIFT SYSTEM

PARKING SYSTEM

Finger Vein

Biometrics

Android/iOS

Proximity

ISO 9001 Certified

CE FC RoHS COMPLIANT

http://www.chiyu-t.com.tw

Chiayi (HQ) , Taiwan
Tel/Fax : +886-5-2325465 / +886-5-2910918
Add: No. 293, Siwei Road, Chiayi City 60085 , Taiwan
Taipei Branch, Taiwan
Tel/Fax : +886-2-22783389 / +886-2-29998139
Shenzhen Branch, China
Tel/Fax : +86-755-82514171 / +86-755-27398787-205

WiFi/3G TA & AC

- Software user friendly
- Real time door log
- Wireless time attendance

Parking Solution

- License plate snapshot feature
- Easy to install and user friendly
- 2.4G / UHF long range system

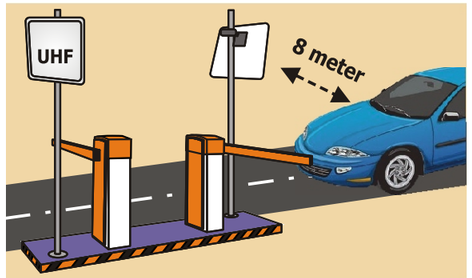

Lift Control

- Unlimited users
- Floor Security for 128 floors
- Hall calling system up to 7 floors

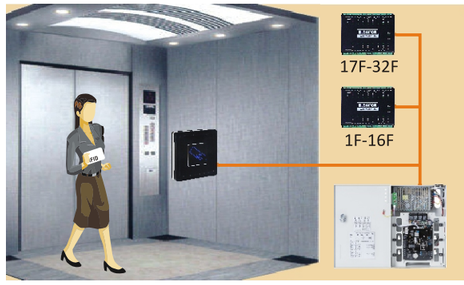

Attendance Report

- Simple first IN last OUT report
- Regular shift / Flexible shift
- Absence/late in/early out report

School Attendance

- Event alerts & SMS message
- Student Campus Solution
- Centralized all data into one server

Remote Control

- Real time attendance log
- Centralized all attendance report
- Global 3G network connection

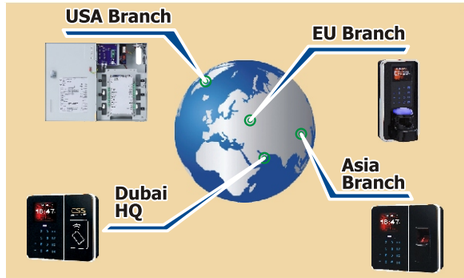

AC & TA System - TCP/IP - WebServer - 2 YEAR WARRANTY

Finger Vein / Face Recognition		
	CSS-722	10,000 User(Cards) / 65,000 Logs / 12,000 Finger Vein Capacity Finger Vein / Card / PIN Match On Card(Mifare only)
	BioSense-FA1	2,000 Users / 200,000 Records Face + Card + Password
Biometrics Fingerprint (Fingerprint + Card + Password)		
	BioSense-III-T IP65	9,590 Fingerprints / 10,000 Cards / 65,000 Logs Optional : Voice Indicator
	BioSense-III	9,590 Fingerprints / 20,000 Cards / 65,000 Logs Optional : 3G, WiFi, USB, Voice Indicator
	BioSense-II Bio Reader	1,000 Fingerprints / 20,000 Cards / 38,000 Logs Optional : 3G, WiFi, USB, Voice Indicator Bio Reader : RS485 fingerprint reader for Biosense II only
	BioSense IP54 optional	9,590 Fingerprints / 20,000 Cards / 50,000 Logs Can switch to controller mode or dummy reader mode
	BF-631W	9,590 Fingerprints / 20,000 Cards / 65,000 Logs Optional : 3G, WiFi, USB, Voice Indicator
Proximity RFID Card (Card + Password)		
	CSS-800	Multi Door (Up to 8 doors) 20,000 Cards / 65,000 Logs Optional : Voice Indicator, POE
	BF-831W	20,000 Cards / 65,000 Logs Optional : 3G, WiFi, USB, Voice Indicator
	BF-Mini-W	20,000 Cards / 65,000 Logs Optional : 3G, WiFi, USB, Voice Indicator
	CSS-R11	20,000 Cards / 65,535 Logs Optional : POE Relay(CSS-A11); Relay(CSS-A10)
	CSS-A10 CSS-A11	POE Relay Controller (CSS-A11); Relay Controller (CSS-A10); Wiegand Structure; For CSS-R11 Only
	Webpass IP65	20,000 Cards / 65,000 Logs Optional : POE
	SEMAC-S2	Multi Door (Up to 8 doors) 20,000 Cards / 65,000 Logs Power box version (Control Panel + Power Box + adapter)
	SEMAC-D1/D2/D4 SEMAC-RO (relay extend module)	D1 : 1 door 2 ways ; 2 reader 1 relay D2 : 2 doors 2 ways ; 4 reader 2 relay D4 : 4 doors 1 way ; 4 reader 4 relay
Lift System & Floor Security		
	SEMAC-S3-V3 Lift BF-50	Floor security up to 128 floors with BF-333 Wiegand structure/RS485 structure
	BF-333	Each unit manages 16 floors (Max 8 units for 128 floors)