EZ-IPS6836IR200E
EZ-IPS692812IR200E

H.264 2.0MP STARLIGHT IR DOME IP CAMERA

H.264 2.0MP STARLIGHT VARIFOCAL IR DOME IP CAMERA

FEATURES

- ONVIF 2.4
- PoE: Power over Ethernet
- 2.0 MegaPixel (1080P)
- Built-in SONY STARVIS IMX290
- True WDR: 120dB WDR
- Day/ Night: 20M/ 30M IR Distance
- Metal Housing to Withstand Years of Use
- External Jack for Audio I/ O (Optional)
- Auto-Network Function

SPECIFICATION

MODEL	EZ-IPS6836IR200E	EZ-IPS692812IR200E
Video Compression	H.264	
Image Sensor	1/2.8" SONY STARVIS CMOS Sensor	
Total Number of Pixels	1920(H) X 1080(V)	
Resolution	2.0 MegaPixel	
Frame Rate	30fps at 1920 x 1080 (NTSC) 25fps at 1920 x 1080 (PAL)	
Dual Stream	Main Stream: 1920 x 1080 (2.0MP) Sub Stream: 720 X 576/ 640 X 480	
Lens	3.6mm Lens	2.8-12mm Lens
Min. Illumination	0.001LUX/ F1.2 (0 LUX IR On)	
Shutter Control	NTSC: 1/30 ~ 1/100,000sec PAL: 1/25 ~ 1/100,000sec	
Day/Night	Built-in 24PCS IR LED	Built-in 36PCS IR LED
IR Distance	20 Meters	30 Meters
Audio	Optional: Audio In/ Out (G.711)	
Network Protocol	TCP/IP,HTTP,FTP,DHCP,DNS,DDNS,RTP,RTSP, RTCP,PPPOE,NTP,SMTP	
Ethernet	1 x RJ45 10M/ 100M Ethernet Interface	
Power	12V DC/ PoE IEEE 802.3af	
PoE Power Consumption	0.07A (48V DC)/ 3.12W	0.09A (48V DC)/ 4.08W
Operating Temperature	-40°C ~ 50°C (-40°F ~ 122°F)	
Operating Humidity	95% (Non-Condensing)	
Dimension	76mm(H) X 93mm(Dia.)	96mm(H) X 119mm(Dia.)
Weight	0.3 kg	0.63 kg

DIMENSION

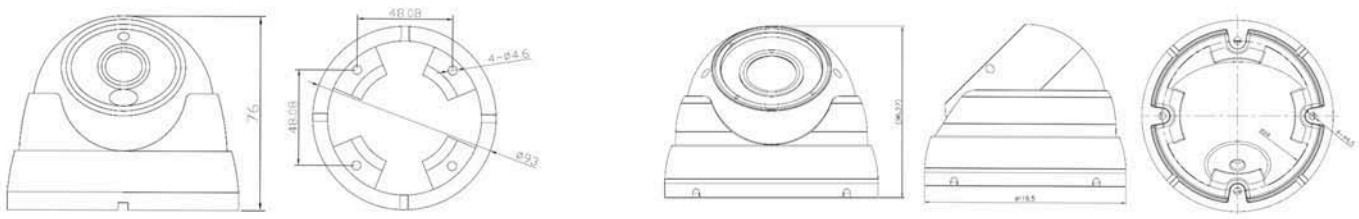

Unit : mm

EZ-IPS7636IR200E
EZ-IPS772812IR200E

H.264 2.0MP STARLIGHT IR BULLET IP CAMERA

H.264 2.0MP STARLIGHT VARIFOCAL IR BULLET IP CAMERA

FEATURES

- ONVIF 2.4
- PoE: Power over Ethernet
- 2.0 MegaPixel (1080P)
- Built-in SONY STARVIS IMX290
- True WDR: 120dB WDR
- Weatherproof IP66
- Day/ Night: 30M/ 40M IR Distance
- Metal Housing to Withstand Years of Use
- External Jack for Audio I/ O (Optional)
- Auto-Network Function

HD 1080P | ONVIF 2.3 | POE | 3-AXIS | IP 66

SPECIFICATION

MODEL	EZ-IPS7636IR200E	EZ-IPS772812IR200E
Video Compression	H.264	
Image Sensor	1/2.8" SONY STARVIS CMOS Sensor	
Total Number of Pixels	1920(H) X 1080(V)	
Resolution	2.0 MegaPixel	
Frame Rate	30fps at 1920 x 1080 (NTSC) 25fps at 1920 x 1080 (PAL)	
Dual Stream	Main Stream: 1920 x 1080 (2.0MP) Sub Stream: 720 X 576/ 640 X 480	
Lens	3.6mm Lens	2.8-12mm Lens
Min. Illumination	0.001LUX/ F1.2 (0 LUX IR On)	
Shutter Control	NTSC: 1/30 ~ 1/100,000sec PAL: 1/25 ~ 1/100,000sec	
Day/Night	Built-in 36PCS IR LED	Built-in 42PCS IR LED
IR Distance	30 Meters	40 Meters
Audio	Optional: Audio In/ Out (G.711)	
Network Protocol	TCP/IP,HTTP,FTP,DHCP,DNS,DDNS,RTP,RTSP, RTCP,PPPOE,NTP,SMTP	
Ethernet	1 x RJ45 10M/ 100M Ethernet Interface	
Power	12V DC/ PoE IEEE 802.3af	
PoE Power Consumption	0.08A (48V DC)/ 3.72W	0.1A (48V DC)/ 4.56W
Operating Temperature	-40°C ~ 50°C (-40°F ~ 122°F)	
Operating Humidity	95% (Non-Condensing)	
Dimension	160mm(L) X 64mm(W) X 67mm(H)	252mm(L) X 83mm(W) X 85mm(H)
Weight	0.43 kg	0.75 kg

DIMENSION

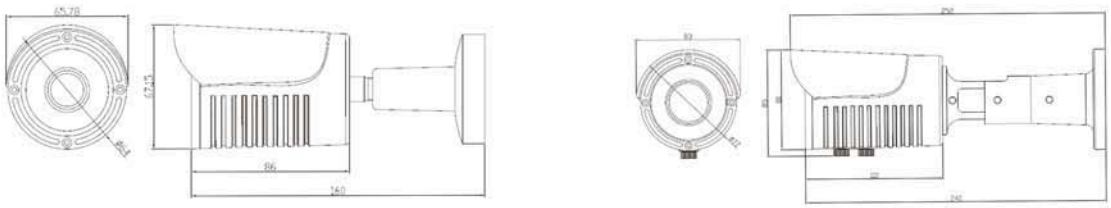

Unit : mm