EZ-IP796060IR300E
H.265 3.0MP LICENSE PLATE RECOGNITION IP CAMERA, POE

EZ-IP796060IR500E
H.265 5.0MP LICENSE PLATE RECOGNITION IP CAMERA, POE

FEATURES

- ONVIF 2.6 (H.264)
- ROI (Region of Interest): Record Areas Where Matter Most
- Intelligent Analysis:
  Cross Counting, Perimeter Intrusion Detection, Line Cross Detection, Stationary Object Detection, Pedestrian Detection
- LPR: License Plate Recognition
- For Car Speed to 70km/ H
- Built-in 6.0-60mm IR Auto Iris Lens
- Scheduling Record to SD Card (up to 128GB)
- Alarm I/ O, Audio I/ O, RS485, BNC Output, Reset Button

H.265 H.264 | ONVIF 2.6 | POE | RS 485

SPECIFICATION
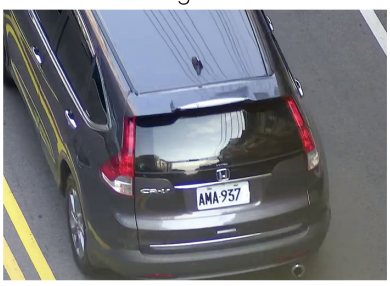
MODEL	EZ-IP796060IR300E	EZ-IP796060IR500E
Video Compression	H.265 / H.264	
Image Sensor	1/3" AR0330	1/2.9" SONY STARVIS IMX326
Total Number of Pixels	2048(H) X 1536(V)	2592(H) X 1944(V)
Resolution	3.0 MegaPixel	5.0 MegaPixel
Frame Rate	30fps at 2048 x 1536 (NTSC) 25fps at 2048 x 1536 (PAL)	15fps at 2592 x 1944 (NTSC) 15fps at 2592 x 1520 (PAL)
Triple Stream	Main Stream: 2048 X 1536/ 3.0MP Sub Stream: 1280 X 720 (max.) Mobile Stream: 640 X 480 (max.)	Main Stream: 2592 X 1944/ 5.0MP Sub Stream: 1280 X 720 (max.) Mobile Stream: 640 X 480 (max.)
Min. Illumination	0.05 LUX/ F1.2 (0 LUX IR On)	0.01 LUX/ F1.2 (0 LUX IR On)
Shutter Control	NTSC/ PAL: 1/5 ~ 1/20,000sec	
Lens	6.0-60mm Auto IR Lens, IR	
Interface	SD Card Slot, Alarm I/ O ,Audio I/O, RS485, Reset, BNC Output	
IR LED	12pcs High Power IR LED	
IR Distance	150M	
Network Protocol	TCP/IP, UDP, RTP/RTCP, RTSP, HTTP, SMTP, DNS, DDNS, DHCP, FTP, NTP, PPPoE, UPNP, HTTPS	
Ethernet	1 x RJ45 10M/ 100M Ethernet Interface	
Power	12V DC/ PoE IEEE 802.3af	
PoE Power Consumption	IP Camera: 0.1A (48V DC)/ 4.5W	
Operating Temperature	-10°C ~ 60°C (-14°F ~ 140°F)	
Operating Humidity	90% or Less (Non-Condensing)	
Dimension	120mm(dia.) X 150mm(H) X 400mm(L)	
Weight	2.0kgs