



2M 10X Optical Bullet IP Camera, WDR-Pro ANC-2460MD

IP66
WDR-Pro
Sony Sensor
Micro-SD Slot
10X Optical Zoom
ONVIF 2.4 / Profiles

Features :


Support 2 way audio
10X optical zoom , 4X digital zoom
Free bundled 64CH recording software
Complied with IP66 for outdoor installation
Support Smart focus / Auto focus / Step focus
Built in NVR capability for recording and playback easily
Support H.264 / MPEG4 / MJPEG multi-codec and multi-streaming
Outdoor bullet type with 10X optical zoom and full function of I/O interface
Support advanced setting of WDR-Pro, Defog, 3D NR, Auto Iris, Low lux mode, Exposure control

Specfication

Up to 30 fps at 1920 x 1080 of video resolution
Built - in Motion Detection & Email Notification
Built - in Samba function to store image/video at local area network directly
Built - in Micro-SD Card slot for easy storing and playback image/video
High power IR leds with mechanical ICR and auto light sensor for day and night monitoring

Connectivity

Support easy installation with NAT transversal DDNS server for port setting free
Support connectivity with iPhone, smart phones and all browsers including IE, Firefox, Chrome, Safari and Opera

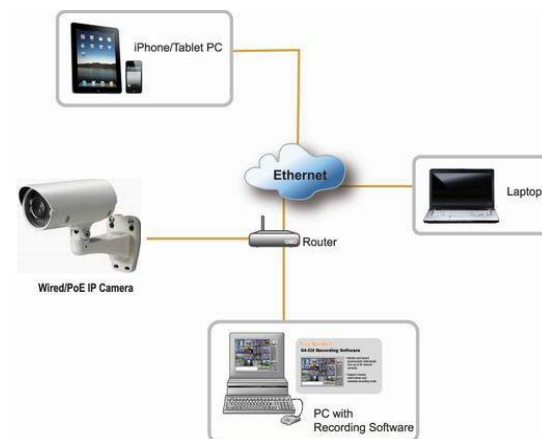

Package

Package: Camera, Power Adapter, bracket, Installation Software & Manual on CD



Power Adapter



Software CD



Quick Guide



bracket



Screws

Specifications

System	RAM : 4GB DDR ROM : 16MB flash ROM
Camera specification	1/2.8 Sony CMOS sensor IMX236 Resolution:1920x1080
IR Led	High power IR Leds, 30~40 M visible Auto/Manual mode
Lens	10X optical zoom lens, auto iris, auto focus f = 5.1~ 51mm, F1.8~3.0 Fov(D), 66.6° ~ 7.2°
Protocol	TCP/IP, HTTP, SMTP, FTP, DDNS, UPnP, Telnet, NTP, PPPoE, DNS, DHCP and RTSP
Video Resolution	Up to 30 frames at 1920x1080, 1280x1024 1280x800, 640x480, 320x240 and 176x144
Algorithm supported	H.264/MPEG4/MJPEG multi-codec for streaming video JPEG for still image
Audio	G.711/AMR/AAC,Omni-directional Microphone Support 2 way audio
Physical	10 baseT or 100 baseT Fast Ethernet auto negotiation
I/O Interface	RJ-45, DI, Audio in, Audio out, Video out, DC Power, Micro-SD slot (inside camera)
Power	Input: 100-240VAC, 50/60Hz, 0.7A Output: 12VDC, 1.5A Consumption: Max 10 W Support 802.3af compliant Power over Ethernet
EMI & Safety	CE, FCC
Dimension	Length : 165mm, Diameter : 75mm
Operating Environment	Temperature : -20 ~ 50°C Humidity : 85% RH
Weight	NET. 600g With bracket : 800g

※ Products specifications and design subject to change without notice ※

2百萬像素10倍光學子彈型網路監視器, 支援寬動態技術(WDR-Pro) ANC-2460MD



10 倍光學變焦
支援IP66防水功能
採用SONY感光元件
內建Micro SD卡插槽
支援ONVIF 2.4 / ProfileS
具備WDR(寬動態)-Pro功能

產品特點：


支援雙向語音。
內建NVR錄影和播放功能。
10倍光學變焦，4倍數位變焦。
支援IP66防水功能，防止攝影機進水損壞。
支援H.264 / MPEG4 / MJPEG多編解碼器和多組影像串流。
提供免費64路網路監視軟體方便客戶安裝錄影錄音功能。
支援自動對焦，智能對焦，快速對焦，達成對焦一步到位。
室外子彈型10倍光學變焦網路監視器與 I / O接口的全功能。
支援WDR-PRO功能, 除霧功能, 3D NR, 自動光圈模式, 低照度模式, 曝光控制等多功能可選擇。

規範：

高達每秒30幀的1920×1080視頻分辨率。
內置移動偵測並可發送E-mail電子郵件通知。
內建Samba功能直接儲存照片/影像在局域網。
內建Micro SD卡插槽，方便儲存和回放照片/影像。
支援高功率自動紅外線濾光片，適用於日夜監控。

連接：

支援簡易安裝具備DDNS伺服器NAT穿透免PORT號設置。
支援iPhone，所有智能手機和所有的瀏覽器包括IE, Firefox, Chrome, Safari, Opera聯結。

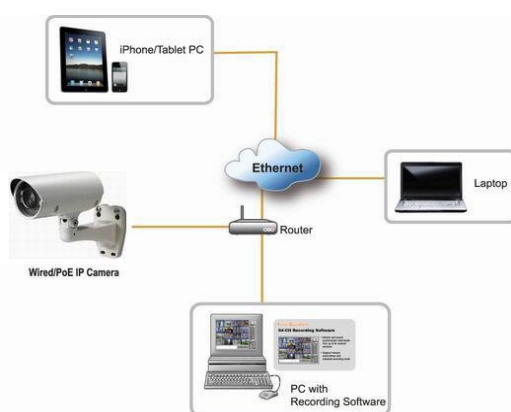

產品包裝：

監視器、電源轉換器、螺絲、托架、安裝軟件和手冊光碟。



電源轉換器



光碟



手冊



托架



螺絲

規格	
系統	RAM : 4GB DDR ROM : 16MB flash ROM
監視器規格	採用1/2.8 SONY IMX236 CMOS 感光元件 解析度 : 1920x1080
紅外燈	高功率紅外燈:自動/手動模式，可達 30 ~ 40 米以上可見。
鏡頭規格	10倍光學變焦鏡頭，自動光圈，自動對焦 f = 5.1~ 51mm, F1.8~3.0 Fov(D), 66.6° ~ 7.2°
通訊協議	TCP/IP, HTTP, SMTP, FTP, DDNS, UPnP, Telnet, NTP, PPPoE, DNS, DHCP and RTSP
影像解析度	1920×1080, 1280×1024, 1280×800, 640×480, 320×240和 176×144可調，皆可達每秒30張(含)。
支援壓縮模式	支援壓縮模式H.264 / MPEG4 / MJPEG多編解碼器和多 組影像串流，並支援JPEG照片檔案。
音頻	採用音頻G.711 / AMR / AAC壓縮方式 全項麥克風支援 支援雙向語音
乙太網路	支援10 BASET或100 BASET快速乙太網自動協商。
I/O 接口	RJ-45, DI, 音頻輸入, 音頻輸出, 影像輸出, 直流電源, Micro SD插槽 (監視器內)
電源功率	電源輸入 : 100-240VAC, 50/60Hz, 0.7A 電源輸出 : 12VDC, 1.5A 電力消耗 : 最大 10 瓦 支援符合802.3af標準POE乙太網供電。
安規認證	CE, FCC
產品尺寸	長度 : 165 mm, 直徑 : 75 mm
操作環境	溫度 : -20 ~ 50°C 濕度 : 85% RH
重量	淨重 600 克 (不含托架) 淨重 800 克 (含托架)

※產品規格及設計如有更改，恕不另行通知※