Access controlled... Future secured.

PORTFOLIO

INDOOR PRODUCTS

AUTOMATIC SYSTEMS
IBR GROUP

PEDESTRIAN

SECURITY ENTRANCE LANES

SmartLane Series

The elegant and discreet design of the SmartLane range of high security bidirectional and speed (opening time < 1 sec.) gates blends seamlessly into any type of architecture.

SmartLane 900

STANDARD LANE WITH COMPACT FOOTPRINT

- Passage width: from 500 to 600 mm
- Obstacle heights: 1000/1200/1700/1900 mm
- Footprint (W x L): 1200 x 1200 mm

SmartLane 910-911-912

WIDE LANE

- Passage width: from 800 to 900 mm
- Obstacle heights: 1000/1200/1700/1900 mm
- Footprint (W x L): 1800 x 1200-1600-2000 mm

* picture SmartLane 910

SmartLane 901

STANDARD LANE WITH ENHANCED ENTRANCE CONTROL

- Passage width: from 500 to 600 mm
- Obstacle heights: 1000/1200/1700/1900 mm
- Footprint (W x L): 1200 x 1600 mm

SmartLane 910-911-912 Twin

DUAL LANE WITH COMPACT FOOTPRINT

- Passage width: 2 x 500 mm
- Obstacle heights: 1000/1200/ 1700/1900 mm
- Footprint (W x L): 1550 x 1200-1600-2000 mm

* picture SmartLane 910 Twin

SmartLane 902

STANDARD LANE WITH ENHANCED ENTRANCE / EXIT CONTROL

- Passage width: from 500 to 600 mm
- Obstacle heights: 1000/1200/1700/1900 mm
- Footprint (W x L): 1200 x 2000 mm

SmartLane 935

MATCHING SMARTLANE 90x / 91x

- Passage width: 900 mm
- Obstacle heights: 1200/1700/1900 mm
- Footprint (W x L): 1280 x 1200 mm

CONFIGURATION EXAMPLES

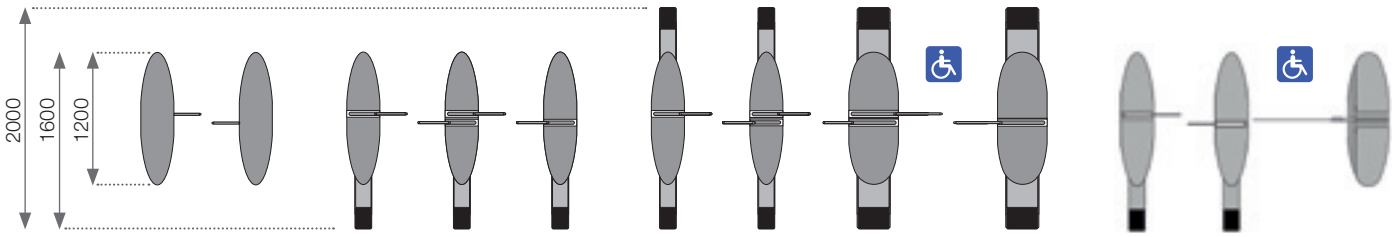

SmartLane 900 | SmartLane 901 | SmartLane 902 + SmartLane 912 | SmartLane 901 + SmartLane 935

SECURITY ENTRANCE LANES

PNG Series

The bidirectional and speed (opening time < 1 sec.) PNG range of products combines physical and electronic high security features. This series benefits from more than 10 years of performance and reliability. Their design is perfect for industrial and secured environments.

PNG 380

STANDARD LANE
WITH COMPACT FOOTPRINT

- Passage width:
  from 500 to 600 mm
- Obstacle heights:
  1000/1200/1700/1900 mm
- Footprint (W x L): 1270 x 1270 mm

PNG 390-391-392

WIDE LANE

- Passage width:
  from 800 to 900 mm
- Obstacle heights:
  1000/1200/1700/1900 mm
- Footprint (W x L): 1870 x 1270-1635-2000 mm

* picture PNG 390

PNG 381

STANDARD LANE WITH ENHANCED
ENTRANCE CONTROL

- Passage width:
  from 500 to 600 mm
- Obstacle heights:
  1000/1200/1700/1900 mm
- Footprint (W x L): 1270 x 1635 mm

PNG 390-391-392 Twin

DUAL LANE WITH COMPACT FOOTPRINT

- Passage width:
  2 x 500 mm
- Obstacle heights:
  1000/1200/1700/1900 mm
- Footprint (W x L):
  1585 x 1270-1635-2000 mm

* picture PNG 390 Twin

PNG 382

STANDARD LANE WITH ENHANCED
ENTRANCE / EXIT CONTROL

- Passage width:
  from 500 to 600 mm
- Obstacle heights:
  1000/1200/1700/1900 mm
- Footprint (W x L): 1270 x 2000 mm

PMD 335-336-337

SWING GATE MATCHING PNG 38X / 39X

- Passage width: 900 mm
- Obstacle heights:
  1000/1200/1700/1900 mm
- Footprint (W x L):
  1255 x 1270-1635-2000 mm

CONFIGURATION EXAMPLES

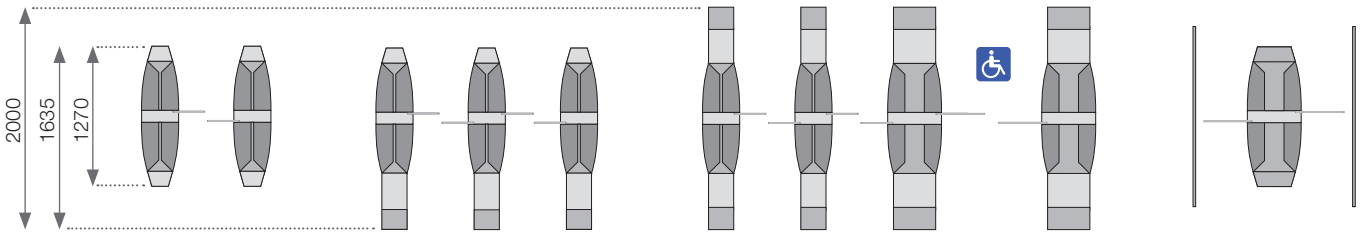

PNG 380 | PNG 381 | PNG 382 + PNG 392 | PNG 390 Twin

SECURITY ENTRANCE LANES

SlimLane Series - Aesthetics & Security

Featuring a streamlined design, SlimLane's double swing door security entrance lanes combine high throughput (opening time < 1 sec.) with advanced user protection while providing a minimal footprint.

SlimLane - 2 doors

SlimLane 940-940SC
STANDARD LANE

- Passage width:
  600 mm (from 550 to 725 mm)
- Obstacle heights:
  900/1200/1500/1700 mm
- Footprint (W x L):
  1000 x 1640 mm/1000 x 1274 mm (SC)

* picture with trolley detection and side glass

SlimLane 950-950SC
WIDE LANE

- Passage width: 900 mm (from 725 to 950 mm)
- Obstacle heights: 900/1200/1500/1700 mm
- Footprint (W x L): 1300 x 1640 mm/1300 x 1274 mm (SC)

SlimLane 950EW
EXTRA-WIDE LANE

- Passage width: 1200 mm
  Obstacle height: 900 mm
- Footprint (W x L): 1600 x 1640 mm

* picture with trolley detection & side glass

CONFIGURATION EXAMPLES

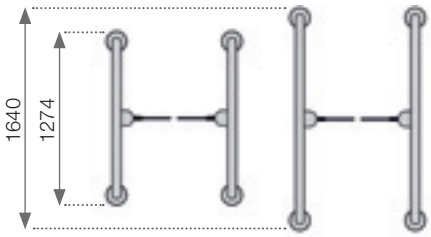

SlimLane 940SC **SlimLane 940**



SlimLane 940 + SlimLane 950



SlimLane 940 + SL 930/931

Securi-Safe



Egress

SECURITY ENTRANCE LANES

SlimLane Series - Greater modularity

A compelling product offering:

- with standard or short cabinets
- with standard or wide lanes
- with 1 or 2 doors
- with low or high obstacles
- with 2 operating modes - Securi-safe or Egress

SlimLane - 1 door

SlimLane 944-944SC
COMPACT LANE

- Passage width:
  550 mm (from 550 to 600 mm)
- Obstacle heights:
  900/1200/1500/1700 mm
- Footprint (W x L):
  857 x 1640 mm/857 x 1274 mm (SC)

* picture with trolley detection & side glass

SlimLane 945-945SC Twin
DUAL COMPACT LANE

- Passage width: 900 mm (from 725 to 950 mm)
- Obstacle heights: 900/1200/1500/1700 mm
- Footprint (W x L):
  1300 x 1640 mm/1565 x 1274 mm (SC)

SlimLane 944SC + 950SC + 944SC + 944SC
WITH TROLLEY DETECTION AND SIDE GLASS

- Installation example with maximum throughput and minimum footprint
- Footprint (W x L): 3122 x 1274 mm (3 standard lanes + 1 wide lane)

CONFIGURATION EXAMPLES

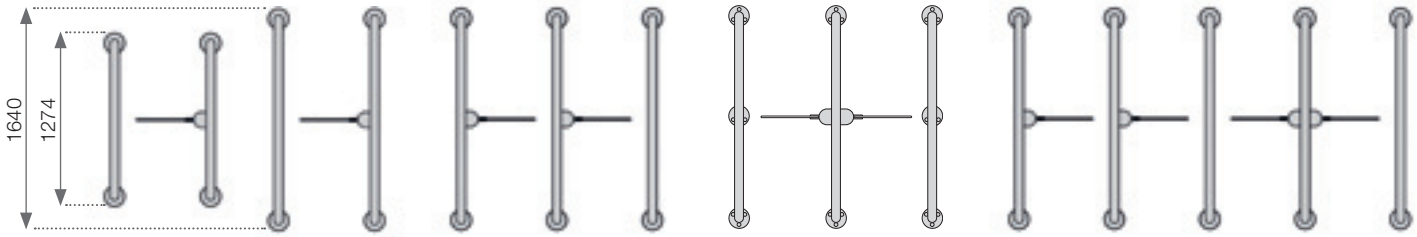

SlimLane 944SC **SlimLane 944** **Double lane SlimLane 944** **SlimLane 945 Twin** **SlimLane 944 + SlimLane 944 + SlimLane 945**

SECURITY DOORS

ClearLock Series

The ClearLock series is a circular security booth with interlocking doors that offers stringent entrance control, particularly required for sensitive sites.

ClearLock 63x
CURVED SECURITY BOOTH

- Single Sliding Doors
- Passage width: 580/700/900 mm
- External diameters: 1050/1150/1485 mm
- Available in double booth (ClearLock 633/634 Twin)

* picture ClearLock 630 with metal detector

ClearLock 64x
SQUARE SECURITY BOOTH

- Single Sliding Doors
- Passage width: 580/700/900 mm
- Footprint: 1050 x 1050/ 1150 x 1150/1485 x 1485 mm

* picture ClearLock 640

ClearLock 65x
FAST SECURITY BOOTH

- Double Sliding Doors
- Available in round, semi-circular, elongated booths
- Passage width: 580/890/900/1050 mm

* picture ClearLock 650

RevLock Series

The RevLock series is a contemporary, security revolving door for prestigious locations.

RevLock 602-612/600-610
3-SECTIONS REVOLVING DOOR

- Passage width: 800 mm
- External diameter: 1600/1800 mm

picture RevLock 600

RevLock 601/611
4-SECTIONS REVOLVING DOOR

- Passage width: 1045 mm
- External diameter: 2300 mm

* picture RevLock 601

InterLock Series

InterLock rectangular booths are equipped with fast sliding doors. They ensure a high level of access control and are particularly suited to public sites.

InterLock 67x
RECTANGULAR BOOTH

- Single or double passage
- Passage width: 700, 800 ou 900 mm
- Footprint (W x L): 1600-2230-2300 x 1500 mm

* picture InterLock 670

CONFIGURATION EXAMPLES



ClearLock 63x



ClearLock 64x



ClearLock 652



ClearLock 654



RevLock 611



InterLock 671

TRIPOD TURNSTILES

TR Series

Bidirectional TR tripod turnstiles are very robust products for sites with heavy use that can function equally well indoors and outdoors.

TBV Series

Bidirectional TBV 327 glass tripod turnstiles provide dissuasive, silent and user-friendly access control required by prestigious corporate facilities.

TR 490
TRIPOD TURNSTILE

- Passage width: 500 mm
- Footprint (W x L): 765 x 1220 mm

TR 492
DOUBLE TRIPOD TURNSTILE

- Passage width: 2 x 500 mm
- Footprint (W x L): 965 x 1220 mm

TR 491
TRIPOD WITH DROPPING ARM

- Passage width: 500 mm
- Footprint (W x L): 765 x 1220 mm

* picture with round leg option

TBV 327
WAIST-HEIGHT GLASS TURNSTILE

- Passage width: 500 mm
- Footprint (W x L): 1350 x 1350 mm

FULL-HEIGHT TURNSTILES

PPV Series

Bidirectional PPV swing gates can be used alone or in conjunction with other products such as SmartLane, PNG, SlimLane and TBV. They can be installed discretely and aesthetically in the entrance area of a building.

PPV 323
MATCHING TBV

- Passage width: 1000 mm
- Obstacle height: 930 mm
- Footprint (W x L): 1215 x 215 mm

SL 931
MATCHING SLIMLANE 94x / 95x AND SMARTLANE 90x / 91x

- Passage width: 900 mm
- Obstacle heights: 1500 / 1700 / 1900 mm
- Footprint (W x L): 1115 x 215 mm

SL 930
MATCHING SLIMLANE 94x / 95x AND SMARTLANE 90x / 91x

- Passage width: 900 mm
- Obstacle heights: 900 / 1000 / 1200 mm
- Footprint (W x L): 1115 x 215 mm

OUTDOOR PRODUCTS

- Toll Barriers
- Parking Barriers
- Traffic Management Barriers
- Fenced Barriers
- Perimeter Access Barriers
- Rising Bollards
- Road Blockers
- Full-Height Turnstiles

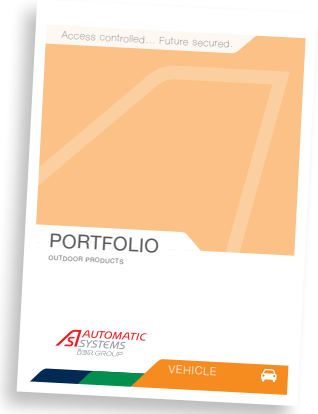

AUTOMATIC SYSTEMS
ISR GROUP

Find the Pedestrian Product for your needs

	Passages/minute [1]	Mobility Impaired	Passage Width (mm)	Obstacle Height (mm)	Footprint	Movement			Activation		Aesthetics		Automatic Opening in Case of Emergency
					Single Lane (mmxmm)	Retractable	Swing	Rotating	Motorised	Manual	Comtempo-rary	Classic	
Security Entrance Lanes													
SlimLane 940	60	♿	575-725	900-1700	1000 x 1640		<1s		●		●		●*
SlimLane 950		♿	725-950		1300x1640		<1s		●		●		●*
SlimLane 950 EW		♿	1200	900	1600x1640		1.2s		●		●		●*
SlimLane 944	60		525-600	900-1700	857x1640		1s		●		●		●*
SlimLane 945 Twin	2x60		2x525-600		1565x1640		1s		●		●		●*
SlimLane 940 SC	60		575-725	900-1700	1000x1274		<1s		●		●		●*
SlimLane 950 SC		♿	725-950		1300x1274		<1s		●		●		●*
SlimLane 944 SC	60		525-600	900-1700	857x1274		1s		●		●		●*
SlimLane 945 SC Twin	2x60		2x525-600		1565x1274		1s		●		●		●*
SmartLane 900	60		500-600	1000-1900	1200x1200	<1s			●		●		●
SmartLane 901					1200x1600	<1s			●		●		●
SmartLane 902					1200x2000	<1s			●		●		●
SmartLane 910	60	♿	800-900	1000-1900	1800x1200	<1s			●		●		●
SmartLane 911		♿			1800x1600	<1s			●		●		●
SmartLane 912		♿			1800x2000	<1s			●		●		●
SmartLane 910 Twin	2x60		2x500-550	1000-1900	1550x1200	<1s			●		●		●
SmartLane 911 Twin					1550x1600	<1s			●		●		●
SmartLane 912 Twin					1550x2000	<1s			●		●		●
PNG 380	60		500-600	1000-1900	1270x1270	<1s			●			●	●
PNG 381					1270x1635	<1s			●			●	●
PNG 382					1270x2000	<1s			●			●	●
PNG 390	60	♿	800-900	1000-1900	1870x1270	<1s			●			●	●
PNG 391		♿			1870x1635	<1s			●			●	●
PNG 392					1870x2000	<1s			●			●	●
PNG 390 Twin	2x60		2x500-550	1000-1900	1585x1270	<1s			●			●	●
PNG 391 Twin					1585x1635	<1s			●			●	●
PNG 392 Twin					1585x2000	<1s			●			●	●
Swing Gates													
SmartLane 935	10	♿	900	1000-1900	1280x1200		4.5s		●			●	●
PMD 335	10	♿	900	1000-1900	1255x1270		4.5s		●			●	●
PMD 336		♿			1255x1635		4.5s		●			●	●
PMD 337		♿			1255x2000		4.5s		●			●	●
SL 930	20	♿	900	900-1200	215x1115		3s		●		●		
SL 931		♿		1200-1900			3s		●		●		
PPV 323	20	♿	1000	932	215x1215		3s		●		●		
Tripod Turnstiles													
TBV 327	15		500	932	1350x1350			●	●		●		
TR 490	20		500	760	765x1220			●		●		●	
TR 491								●		●		●	●
TR 492			2x500		965x1220			●		●		●	
Full-Height Turnstiles													
TRS 370	15		640	2290	1540x1370			●		●		●	
TRS 371	12		560		1540x1529			●		●		●	
TRS 372	2x15		2x640		2400x1370			●		●		●	
Security Doors													
RevLock 600/610	15/20-30/40		750	2090	Ø 1800			●	●		●		
RevLock 602/612					Ø 1600			●	●		●		
RevLock 601/611	12/16-24/32		1000		Ø 2300			●	●		●		
ClearLock 630	6		580	2005	Ø 1050	1.5s			●		●		
ClearLock 631	5		700	2045	Ø 1150	1.8s			●		●		
ClearLock 632	4	♿	900	2090	Ø 1485	1.9s			●		●		
ClearLock 633 Twin	2x4		2x580	2005	1800x1050	1.5s			●		●		
ClearLock 634 Twin	2x4		2x700	2045	2000x1150	1.5s			●		●		
ClearLock 640/643	6		580	2000	1050x1050	1.5s			●			●	
ClearLock 641/644	5		700		1150x1150	1.8s			●			●	
ClearLock 642	4	♿	900		1500x1500	1.9s			●			●	
ClearLock 650	7		580	2005	Ø 1050	1s			●			●	
ClearLock 651	6	♿	900	2090	Ø 1485	1.5s			●			●	
ClearLock 652	6	♿	900		1450x1900	1.5s			●			●	
ClearLock 654			890		1380x930	1.5s			●			●	
ClearLock 655		♿	1050	2400	2300x1540	2s			●			●	
InterLock 670	5	♿	900	2050	1600x1500	1.5s			●			●	
InterLock 671 Twin	2x6		2x800		2230x1500	1.5s			●			●	
InterLock 672 Twin		♿	700+900		2300x1500	1.5s			●			●	

Legend: * Option / [1] varies with access control systems

Port. Pedestrian/EN/04-2014