



RELIABLE QUALITY FROM KINVISION WITH 11-STEP QC PROCESS




Features:

- Vari-focal IR Water-proof camera
- 3-AXIS Bracket, Hidden cable design
- 45~50 meters effective range
- Bulid-in 66*Φ5 IR LED and 4-9mm Manual Zoom Lens
- Aluminium Alloy housing
- Unique feedback circuit for good heat dissipation & stability
- Constant current circuit for longer IR Led life
- Dual glass cutting to prevent refraction, Anti-White & Spot Image
- Crystal optical filter to prevent Color Edge & flash
- 24-hour performance testing & double plate washer



Dimension

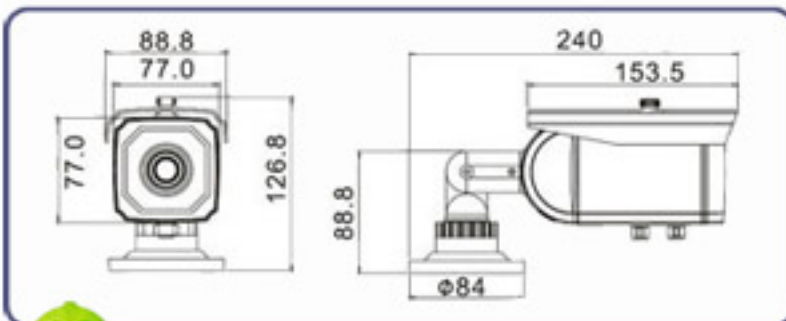

Specification

Model	KV-9265RD	KV-9265RP	KV-9265RA	KV-9265RX	KV-9265RK	KV-9265RG
TV System	PAL:500(H)×582(V)/NTSC:510(H)×494(V)		PAL:752(H)×582(V)/NTSC:768(H)×494(V)			PAL:1024(H)×596(V)/NTSC:1028(H)×508(V)
Scanning System	2:1 Interlace					
Image Sensor	1/4" SHARP CCD		1/3" Sony Super HAD CCD			1/3" Sony EXview HAD CCD II
Horizontal Resolution	420TVL		540TVL	520TVL	600TVL	650TVL
IR distance	45-50m					
Light	66" φ5 Infrared Light					
Lens	4-9mm Manual Zoom Lens					
Dimensions	φ84mm*142mm					
Weight	1500g					

